


序号	修改原因	制图	审核	批准
A				

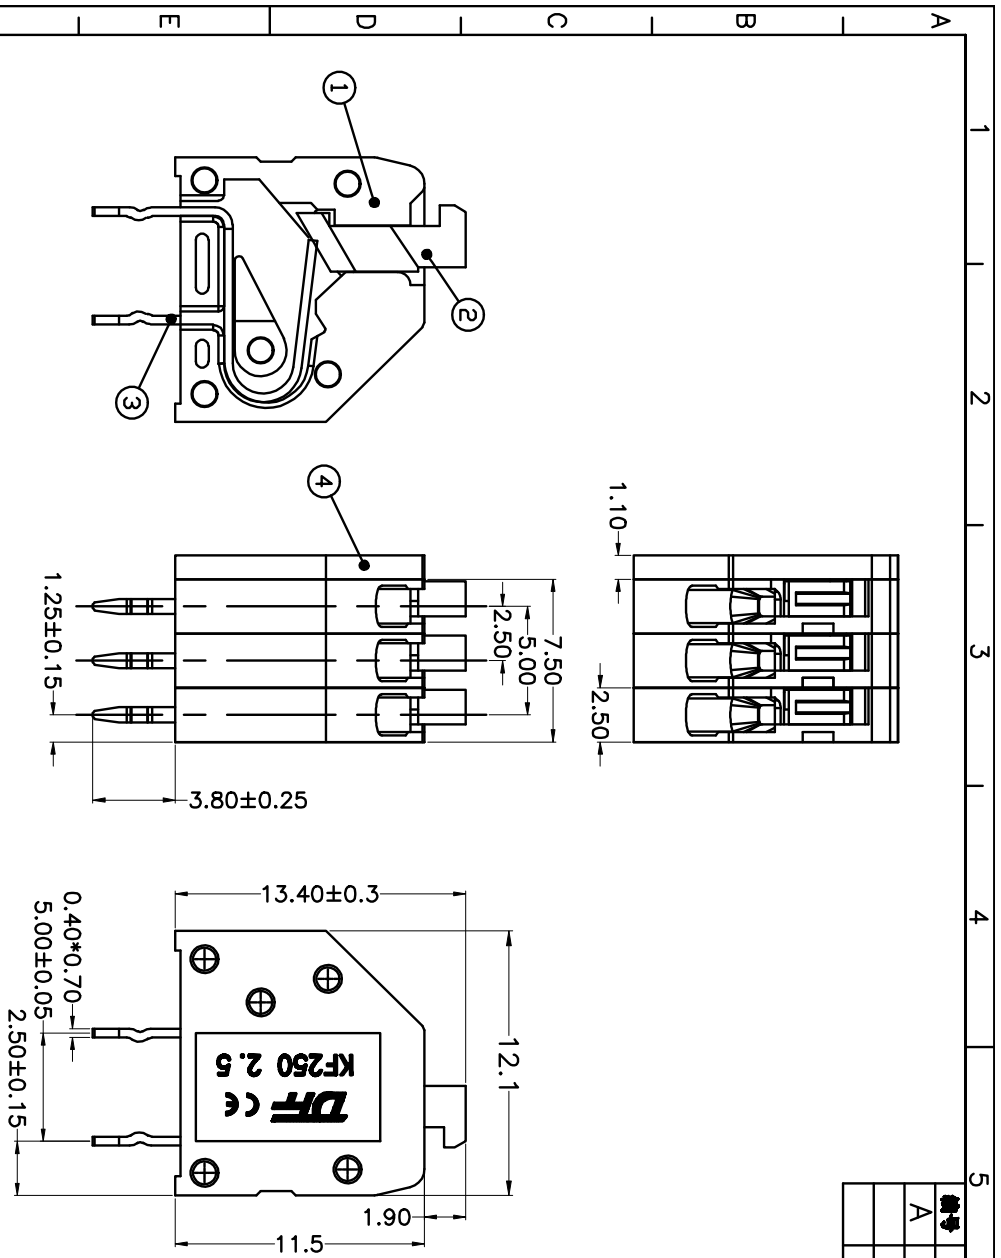

• Material

- ①Housing: PA66, UL94V-0
- ②Button: PA66, UL94V-0
- ③Pin header: Brass, Tin plated
- ④Cover plate: PA66, UL94V-0

• Electrical

Rated Voltage: 300V
 Rated Corrent: 7A
 Contact Resistance: 20mΩ
 Insulation Resistance: 500MΩ/1000V
 Withstanding Voltage: AC2000V/1Min
 Wire Range: 24-20AWG 0.5mm²

• Mechanical

Temperature Range: -40℃~ +105℃
 MAX Soldering: +250℃, 5秒 (5 Seconds)
 Strip length: 8-9mm

尺寸公差:	角度公差:
X, ±0.25	X, ±3°
.X, ±0.2	.X, ±2°
.XX, ±0.15	.XX, ±1°
外观标准	AUTO CAD
比例	1:1
图框编号	1\1

图框编号	产品名称	规格
	KF250A-2.50-3P	
单位	mm	
图框尺寸	A4	产品系列
		KF250A

KAIFENG ELECTRONIC
慈溪市凯峰电子有限公司
 KAIFENG ELECTRONIC CO.,LTD