
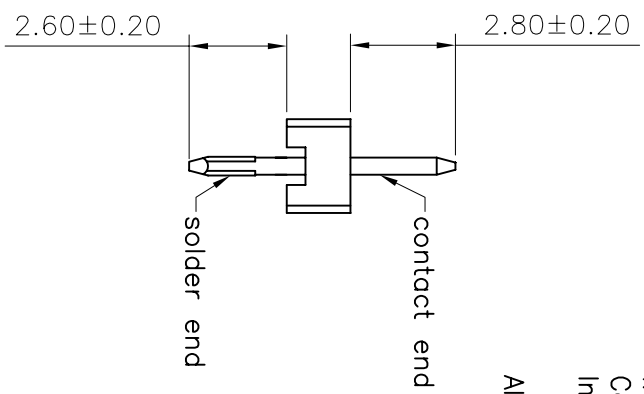
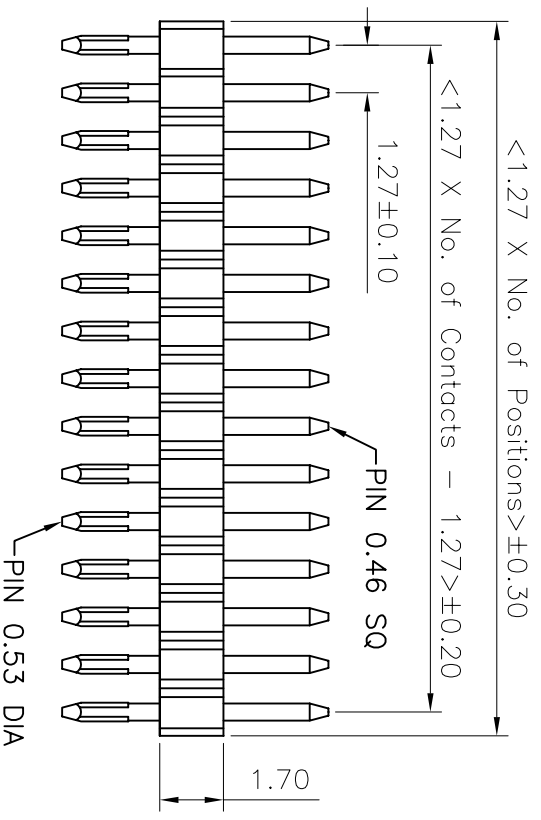


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		轉環保圖	2006.07.28	皮洪斌



Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T


All materials must be GP materials

Ordering Information

G PEA103 - XX XX A 01

No. of Pins per Row: 02-50
 Contact Plating: 01=Tin, 02=Gold Flash Standard, Duplex plating, 05=Gold Flash /Tin

Recommended P.C.Board Hole Layout
 (Tolerance: ± 0.05)



格菱股份有限公司 Greenconn Corporation		GENERAL TOLERANCE		DESIGN: 皮洪斌		DWG. NO. G PEA103-A01		TITLE: 1.27 PIN HEADER SINGLE ROW DIP TYPE BASE 1.70H	
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1	X. $\pm 5^{\circ}$	K. ± 0.30	DATE:	2006.07.28	PART NO.	G PEA103-XX XX A 01
				X. $\pm 2^{\circ}$	X. ± 0.20	CHECKED:			
				.XX $\pm 1^{\circ}$.XX ± 0.15	AUDITED:			
				.XXX $\pm 0.5^{\circ}$.XXX ± 0.10	APPROVED:			