

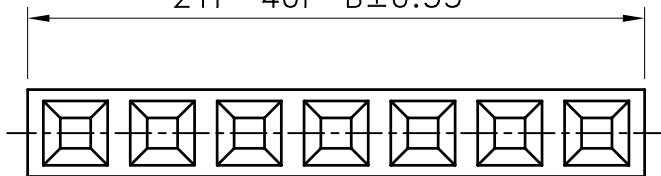


2P-10P B±0.15
 11P-20P B±0.25
 21P-40P B±0.35

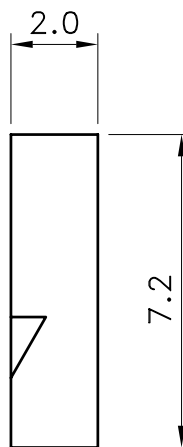

2P-10P A±0.1
 11P-20P A±0.2
 21P-40P A±0.3

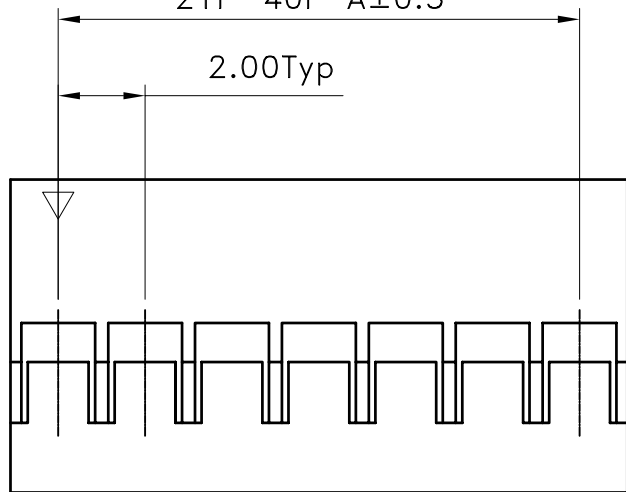

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min.
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ HOUSING

- Part No. : JS-1163-XX
- Poles : 2-40
- Material : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

Poles	Part No.	Dimensions(mm)		Poles	Part No.	Dimensions(mm)	
		A	B			A	B
2	JS-1163-02	2.00	4.20	22	JS-1163-22	42.00	44.20
3	JS-1163-03	4.00	6.20	23	JS-1163-23	44.00	46.20
4	JS-1163-04	6.00	8.20	24	JS-1163-24	46.00	48.20
5	JS-1163-05	8.00	10.20	25	JS-1163-25	48.00	50.20
6	JS-1163-06	10.00	12.20	26	JS-1163-26	50.00	52.20
7	JS-1163-07	12.00	14.20	27	JS-1163-27	52.00	54.20
8	JS-1163-08	14.00	16.20	28	JS-1163-28	54.00	56.20
9	JS-1163-09	16.00	18.20	29	JS-1163-29	56.00	58.20
10	JS-1163-10	18.00	20.20	30	JS-1163-30	58.00	60.20
11	JS-1163-11	20.00	22.20	31	JS-1163-31	60.00	62.20
12	JS-1163-12	22.00	24.20	32	JS-1163-32	62.00	64.20
13	JS-1163-13	24.00	26.20	33	JS-1163-33	64.00	66.20
14	JS-1163-14	26.00	28.20	34	JS-1163-34	66.00	68.20
15	JS-1163-15	28.00	30.20	35	JS-1163-35	68.00	70.20
16	JS-1163-16	30.00	32.20	36	JS-1163-36	70.00	72.20
17	JS-1163-17	32.00	34.20	37	JS-1163-37	72.00	74.20
18	JS-1163-18	34.00	36.20	38	JS-1163-38	74.00	76.20
19	JS-1163-19	36.00	38.20	39	JS-1163-39	76.00	78.20
20	JS-1163-20	38.00	40.20	40	JS-1163-40	78.00	80.20
21	JS-1163-21	40.00	42.20				



喬訊電子工業股份有限公司

CHYAO SHIUNN
 ELECTRONIC INDUSTRIAL LTD.

APPROVED BY

林宗

SCALE



UNIT

mm

TOLERANCE

.0 ±0.3

.00 ±0.2

.000 ±0.1

ALL ±

ANGLE

0° ±

.0° ±

LTR

ECR

ECR

ECR

REVISION RECORD

RoHS compliant

200808-015

200811-017

DATE

06/04/01

08/08/26

08/11/20

LTR

REVISION RECORD

DATE

PART NO JS-1163-XX

2.00mm Center Mini Latch Housing

DRAWN BY

黃科源

DATE

2008/11/20

SIZE

A4

CUSTOMER

Conforms to The RoHS Instruction