
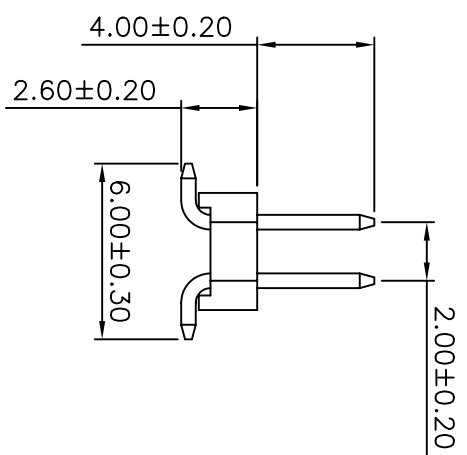



**Specifications**  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0  
 Nylon-6T  
 All materials must be GP materials

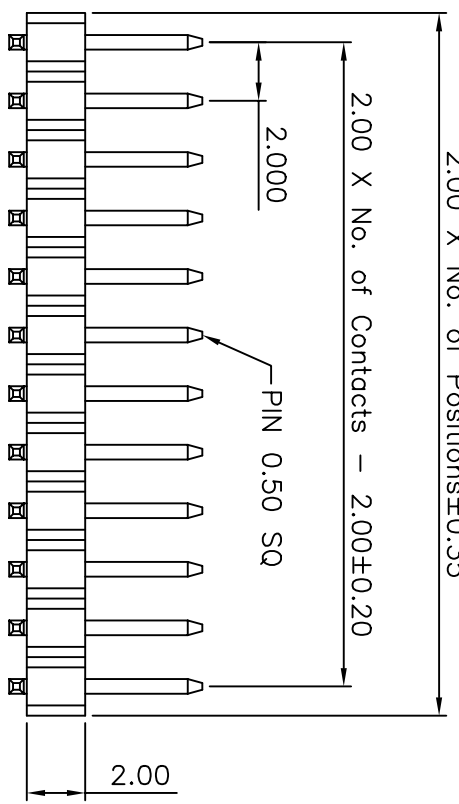

**RECOMMENDED P.C.B LAYOUT**

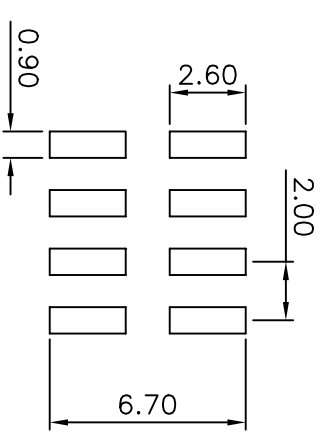

**Ordering Information**

G PFC201 - XX XX A 06

No. of Pins per Row: 02-40  
 Contact Plating: 01=Tin, 02=Gold Flash, Duplex Plating, 05=Gold Flash/Tin, ...

REV.	01	UNIT	mm	SCALE	4=1		<b>格 菱 股 份 有 限 公 司</b> <b>Greenconn Corporation</b>		
							<b>GENERAL TOLERANCE</b> X. ± 5°    X. ± 1° X. ± 2°    XX ± 0.25 XXX ± 0.5°    .XXX ± 0.13		
DRAWN		XIAO PING		DATE		09-08-04		DWG. NO.	
CHECK		DATE		DATE		DATE		G PFC201-A06	
APPROVE		DATE		DATE		DATE		PART NO.	
								G PFC201- XX XX A 06	
TITLE		2.0 PIN HEADER							
		DUAL ROW SMT TYPE							
		BASE 2.0H							