


MANO860

Socket G2 Intel® Quad/Dual Core™ i7/ i5/ i3/ Celeron® Mini ITX SBC with Intel® QM67 PCH, DisplayPort/HDMI/VGA/LVDS, SATA-600 and RAID

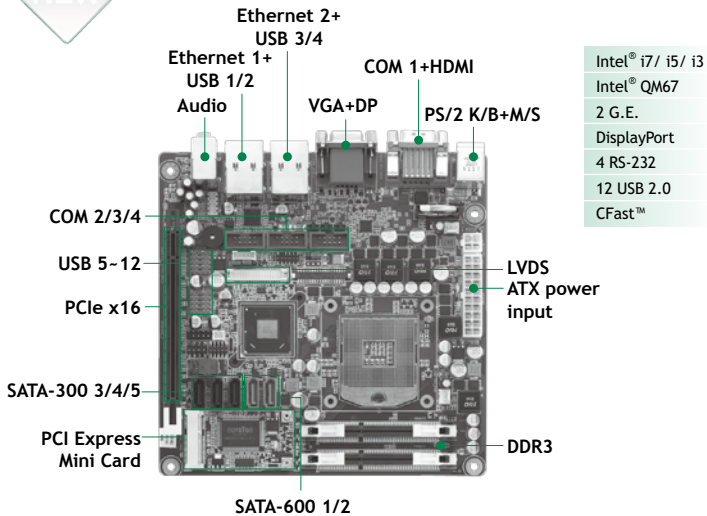

System



CPU	Socket G2 for Intel® Core™ i7/ i5/ i3/ Celeron® processor
System Memory	2 x 204-pin SO-DIMM support DDR3-1066/1333 max. up to 16 GB
Chipset	Intel® QM67 PCH
BIOS	AMI
SSD	1 x CFast™
Watchdog Timer	255 levels, 1-255 sec.
Expansion Interface	1 x PCIe x16 Gen. 2 1 x PCI Express Mini Card
Battery	Lithium 3 V/ 220 mAh
Power Requirements	+12V @ 4.86A, +5V @ 1.28A, +3.3V @ 1.05A, +5VSB @ 0.36A, -12V @ 0.41A
Size	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C - +60°C (32°F - 140°F), operation
Operation Humidity	10% - 95% relative humidity, non-condensing

I/O

MIO	1 x PS/2 keyboard 1 x PS/2 mouse 4 x RS-232 (COM 2/3/4); with +5V/+12V powered
SATA	2 x SATA-600 & 3 x SATA-300 with RAID 0/1/5/10
Hardware Monitoring	Detect CPU/system temperature, voltage and support Smart fan control
Ethernet	1st port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82579LM 2nd port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-in/Line-out speaker-out with Realtek SLB9635
USB	12 x USB 2.0 port
TPM	Infineon SLB9625 for trusted platform
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels (4-IN & 4-OUT)

Features

- Socket G2 Intel® Quad/ Dual Core™ i7/ i5/ i3/ Celeron® processor
- 2 DDR3-1066/1333 MHz, max. up to 16 GB
- PCIe x16 Gen. 2 supported
- SATA-600 with RAID 0/1/5/10 supported
- CFast™ supported
- iAMT supported
- TPM supported

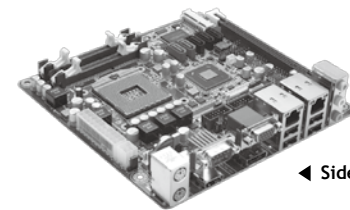

Display

Display Chipset	Intel® HD Graphics 2000/3000
Memory Size	1.7 GB
Display Interface	1 x DP 1 x HDMI 1 x LVDS 1 x VGA

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Ordering Information

Standard

MANO860PHGGA (P/N: E38M860100)	Socket rPGA988 (G2 socket) Mini ITX SBC with Intel® Core™ i7/ i5/ i3, VGA/ DisplayPort/HDMI, 2 10/100/1000Mbps Ethernet, HD audio, 4 COM, 5 SATA and CFast™
--------------------------------	---