


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED

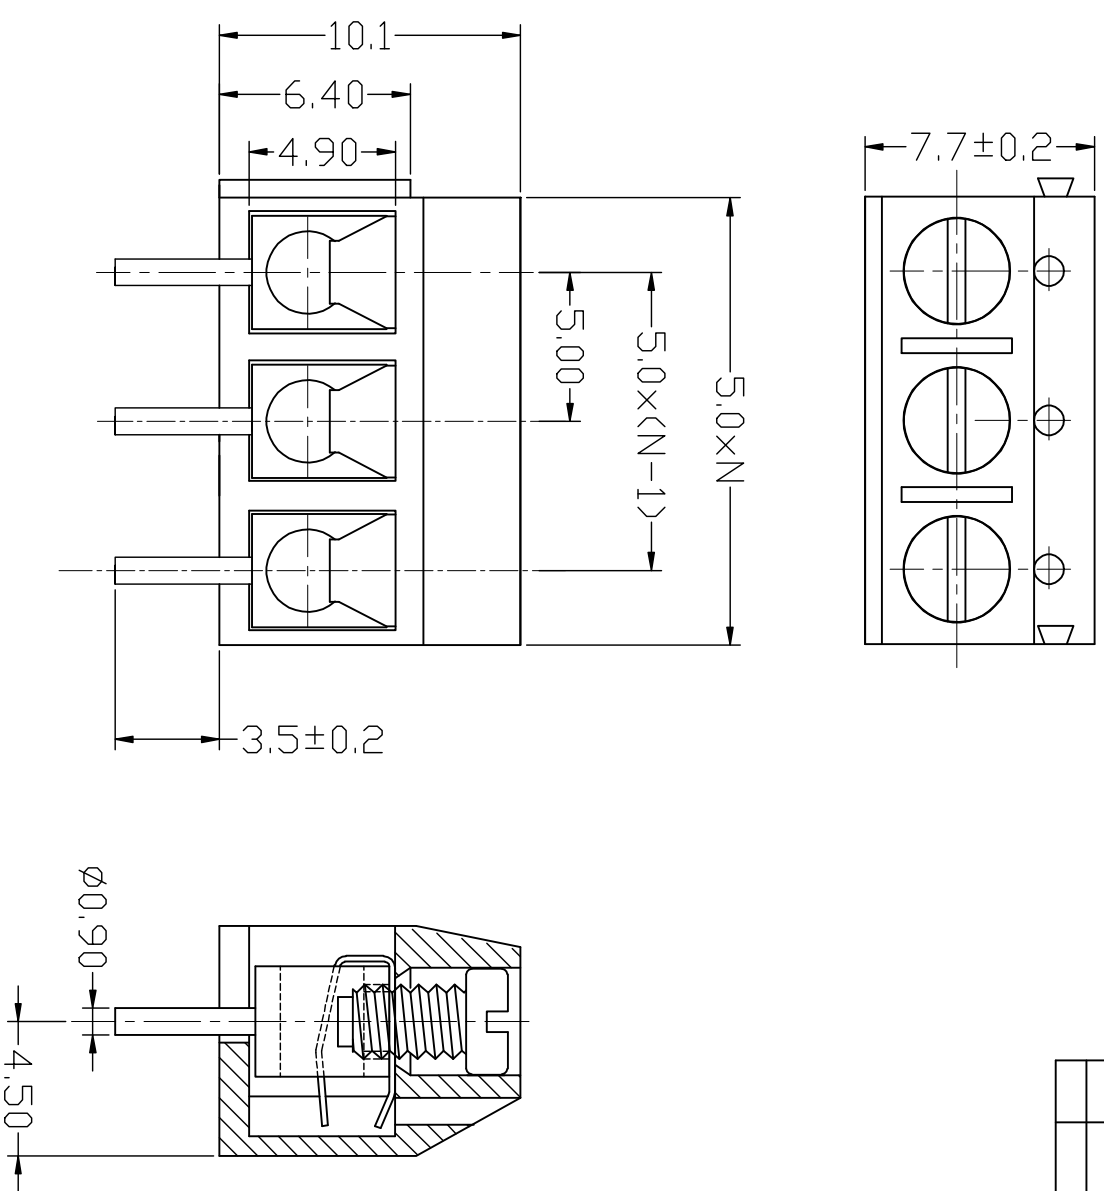

Material
 Screws: M2.5 Steel Zinc Plated
 Wire guard: phosphor bronze Ni plated
 or stainless steel

Pin Header: Brass, Tin Plated
Housing: PA66, UL94V-0

Electrical
 Rated Voltage: 300V
 Rated Current: 12A
 Contact Resistance: 20mOhm
 Insulation Resistance: 5000MOhm/1000V
 Withstanding Voltage: AC 1500V/1Min
 Wire Range: 22 - 14AWG

Mechanical
 Temp. Range: -30C - +120C
 Max. Soldering: +250C for 5sec
 Torque: 0.4Nm
 Strip Length: 5 - 6mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X.	± 0.25	X.	$\pm 5^\circ$	\oplus	$-\nabla$
.X	± 0.15	X.	$\pm 3'$	mm	
.XX	± 0.10	.XX	$\pm 2'$	A4	
DRAWING TYPE		SCALE		TITLE	
SCALE		1:1		EURO TERMINAL BLOCKS PITCH 5.00MM	
DRAWING NO.		SHEET 1 OF 1		SERIES KF301V SERIES	

KF 慈溪市凯峰电子有限公司
 KAIFENG ELECTRONIC CO.,LTD