



Suggested P.C.B Layout

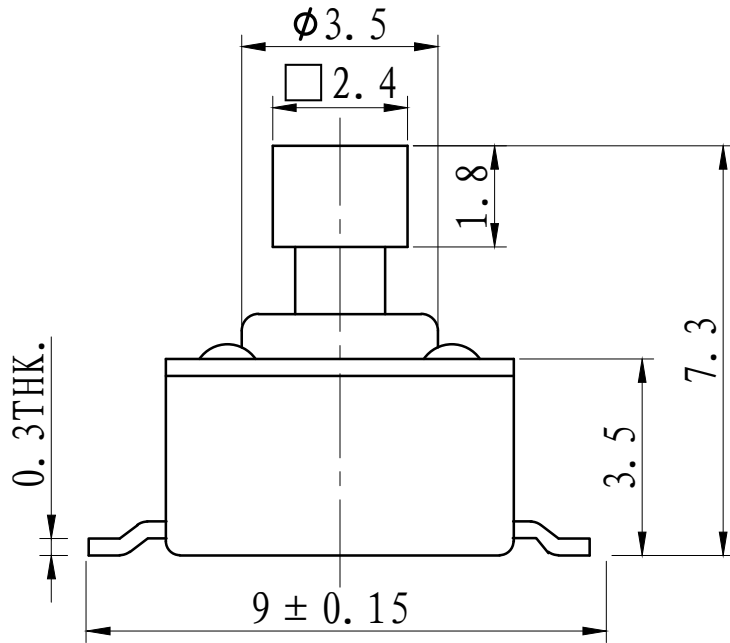

NOTE:
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 X. ± 0.20 .X ± 0.15 .XX ± 0.10

CIRCUIT:



Specifications		
Rating	0.1A 12VDC	
Environment Temperature	-25°C ~ 85°C	
Contact Resistance	≤ 50mΩ	
Insulation Resistance	> 100MΩ (at 500VDC)	
Voltage proof	Terminal-terminal	100V AC/10mA/5s
	Terminal-knob	500V AC/10mA/5s
Electronical life	100,000 Cycles	
Operating Force	250gf ± 30gf	

借(通)用件登记

旧底图总号

底图总号

签名

日期

				Product Drawing				ZHEJIANG JIALONG ELECTRON CO.,LTD Tact Switch	
标记 处数 更改文件号 签名 日期									
设计		标准化		投影	版次	重量	比例		
审核		批准		A0			8:1 (A4)		
工艺		日期		共 1 页		第 1 页			