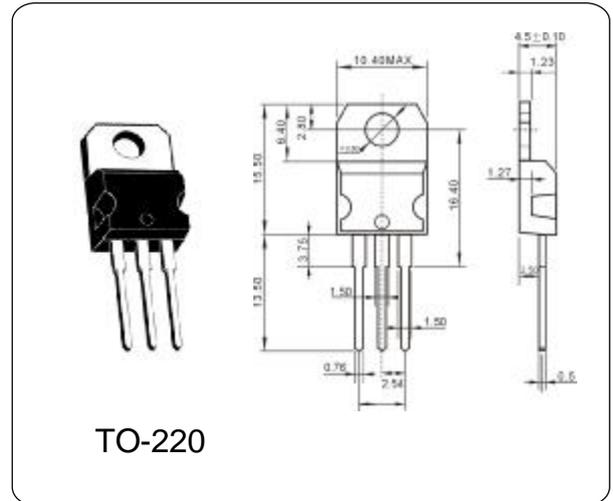


3-Terminal Positive Voltage Regulator
L7905CV
GENERAL DESCRIPTION

The L7905CV series of three terminal positive regulators are available in the TO-220 package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shut down and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Parameter	Symbol	Typ	Unit
Input Voltage	V_I	-35	V
Output Voltage	V_O	-5.0	V
Peak Current	I_{PK}	-2.2	A
Operating Temperature Range	T_{OPR}	0~125	°C
Storage Temperature Rang	T_{STG}	-65~150	°C


ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

(Refer to test circuit, $I_o = -500mA$, $V_i = -10V$, $C_i = 2.2\mu F$, $C_o = 1.0\mu F$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	$V_I = -8V$ to $-20V$, $P_O \leq 15W$	-4.75	-5.0	-5.25	V
Line Regulation (Note1)	Regline	$V_I = -7V$ to $-25V$	—	-7.0	-100	mV
		$V_I = -8V$ to $-12V$	—	-2.0	-50	
Load Regulation (Note1)	Regload	$I_o = -5.0mA$ to $-1.5A$	—	-10	-100	mV
		$I_o = -250mA$ to $-750mA$	—	-3	-50	
Quiescent Current	I_Q	$T_J = +25^\circ C$	—	-3	-6	mA
Quiescent Current Change	ΔI_Q	$I_o = -5mA$ to $-1A$	—	—	-0.5	mA
		$V_I = -8V$ to $-25V$	—	—	-1.3	
Ripple Rejection	RR	$f = 120Hz$, $\Delta V_i = 10V$	54	60	—	dB
Dropout Voltage	V_{Drop}	$I_o = -1A$, $T_J = +25^\circ C$	—	-2	—	V
Short Circuit Current	I_{SC}	$V_I = -35V$, $T_A = +25^\circ C$	—	-300	—	mA
Peak Current	I_{PK}	$T_J = +25^\circ C$	—	-2.2	—	A