






REV.	DESCRIPTION	DATE
03	增加PIN数 變更PIN數	11-05-04 XIAO PING
		05-25-05

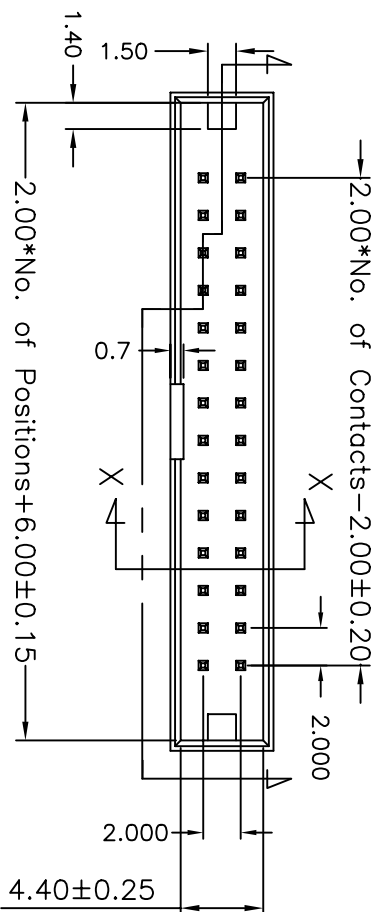

X-X SECTION

**Specifications**  
 Current Rating: 2amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Copper alloy  
 Insulation Material: Polyester. UL94V-0 Nylon6T  
 All materials must be GP materials

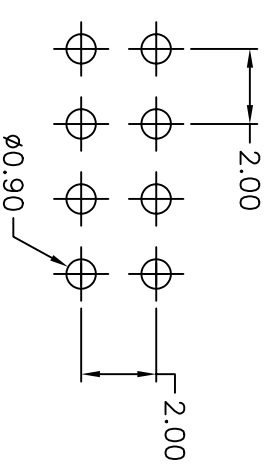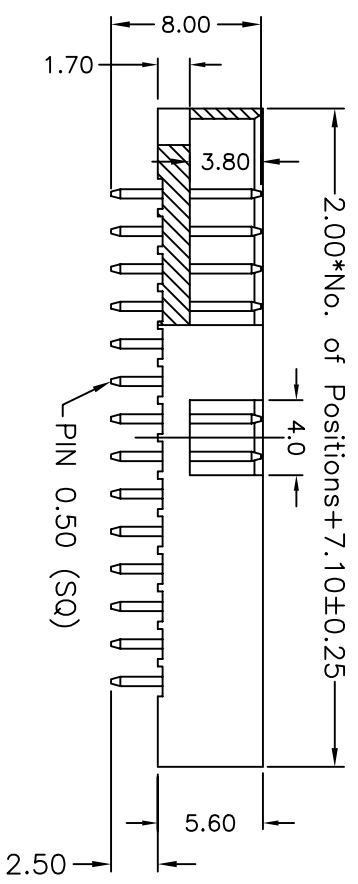

Recommended P.C. Board  
 Hole Layout

**Ordering Information**

G PFA220 - XX XX A 01

No. of Pins per Row  
 04-25  
 Contact Plating  
 01=Tin  
 02=Gold Flash  
 Duplex Plating  
 05=Gold Flash/Tin

格稜股份有限公司  
**Greenconn Corporation**

REV.	03	UNIT.	mm	SCALE.	5:1	
------	----	-------	----	--------	-----	--

GENERAL TOLERANCE		DESIGN:	XIAO PING
X* ± 5'	X.	CHECKED:	DATE: 05-25-05'
X* ± 2'	.X	AUDITED:	DATE:
.XX* ± 1'	.XX	APPROVED:	DATE:
.XXX* ± 0.5'	.XXX		

DWG. NO.	G PFA220-A01
PART NO.	G PFA220-XX XX A01

TITLE.	2.00 BOX HEADER DUAL ROW DIP TYPE BASE 5.60H
--------	----------------------------------------------------

A B C D E F

1 2 3 4 5 6 7 8 9