AX61132TM

1U Rackmount Chassis for ATX Motherboard

Features

- Supports 12" x 9.6" standard ATX MB
- Internal two SATA HDD drive bays
- Supports one PCI riser card
- Supports ATX 270W power supply





▲ Front view



▲ Rear view

Specifications

-	
Standard Color	Black
Construction	Heavy-duty steel
Drive Capacity	Internal 2 x SATA HDD drive bay
Cooling	2 x 4 cm ball bearing fans (15.3 CFM/each)
Front Panel Indicators	1 x power on/off, 1 x HDD
Front Panel Controls	1 x power on/off
Front Panel Connectors	N/A
Pre-punched Panel	N/A
System Board	IMB206/IMB207/IMB208

Expansion Interface	1 x PCI slot (32 bits/33 MHz)
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	482 mm (19") (W) x 430 mm (16.9") (D) x 44 mm (1.73") (H)
Weight (net/gross)	9.8 kg (21.6 lb)/10.5 kg (23.15 lb)

^{*} All specifications and photos are subject to change without notice.

Power Supply Specifications

Items	Mass		Specifications	
	Watt	Input	Output	MTBF
PS270-1U	ATX 270W (PFC)	AC 90~264V (Auto)	+5V @ 18A +12V 1 @ 16A +12V 2 @ 10A +3.3V @ 16A -12V @ 0.8A	100,000 hours

Recommended MB Selections

IMB206 with LGA1156 heatsink (manufacture option) IMB207 with LGA1156 heatsink (manufacture option) IMB208 with LGA1156 heatsink (manufacture option)

Optional Items

E296200100	AX96200 1-slot 32-bit PCI riser card
50761133100E	LGA1156 1U passive CPU cooler

Ordering Information

AX61132TM/X270	With ATX 270W power supply
----------------	----------------------------

^{*}Specifications and certifications are based on options and may vary.

E296200100	AX96200 1-slot 32-bit PCI riser card
50761133100E	LGA1156 1U passive CPU cooler

Chassis Backplanes

Overview

Embedded

Embedded Systems for Transportation Embedded Field Controllers

Embedded MicroBoxes


Industrial Barebone Systems Industrial

Power Supplies

Peripherals & Accessories

Appendix

Dimensions

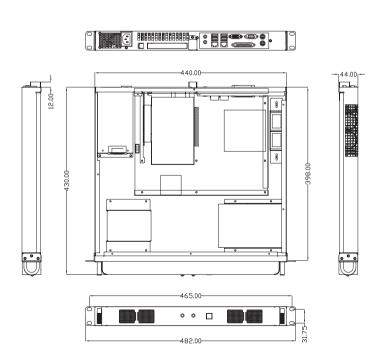

^{*} All specifications and photos are subject to change without notice. © 2014 Axiomtek Co., Ltd. All rights reserved.