
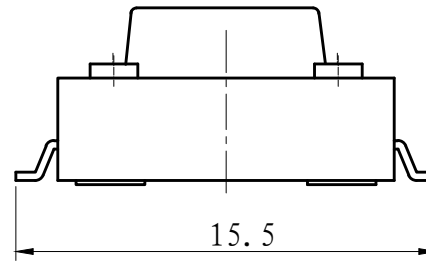


Suggested P.C.B. Layout

Specifications		
Rating	0.05A 12VDC	
Environment Temperature	-25°C ~ 85°C	
Contact Resistance	≤ 50mΩ	
Insulation Resistance	≥ 100MΩ (at 500VDC)	
Voltage proof	Terminal-terminal	100V AC/10mA/5s
	Terminal-knob	500V AC/10mA/5s
Electronical life	50000 Cycles	
Operating Force	2.5 N ± 0.3N	

CIRCUIT:



NOTE:
TOLERANCE UNLESS OTHERWISE SPECIFIED
X. ± 0.20 . X ± 0.15 . XX ± 0.10

借(通)用件登记

旧底图总号

底图总号

签名

日期

						Product drawing				ZHEJIANG JIALONG ELECTRON CO., LTD	
										Tact Switch	
标记	处数	更改文件号	签名	日期		投影	版次	重量	比例	11-TC-1212A SMD	
设计			标准化			第一角	A0		4:1 (A4)		
审核			批准								
工艺			日期			共 1 页		第 1 页			