


电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 10A 15A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 22-14AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical
 温度范围/Temp.Range: -30°C~+120°C
 扭矩/Torque: 0.4Nm(3.5lb`in)
 剥线长度/Strip length: 5-6mm

尺寸/Dimensions
 间距/Pitch: 5.0mm
 极数/Poles: 2P-24P
材质及电镀/Material
 塑件/Housing: PBT, UL94V-0
 螺丝/Screws: M2.5, steel Zinc plated
 方针/Pin header: Brass/Steel, Tin plated
 弹片/Shrapnel: Phosphor bronze, Ni plated

订购方式:
HOW TO ORDER

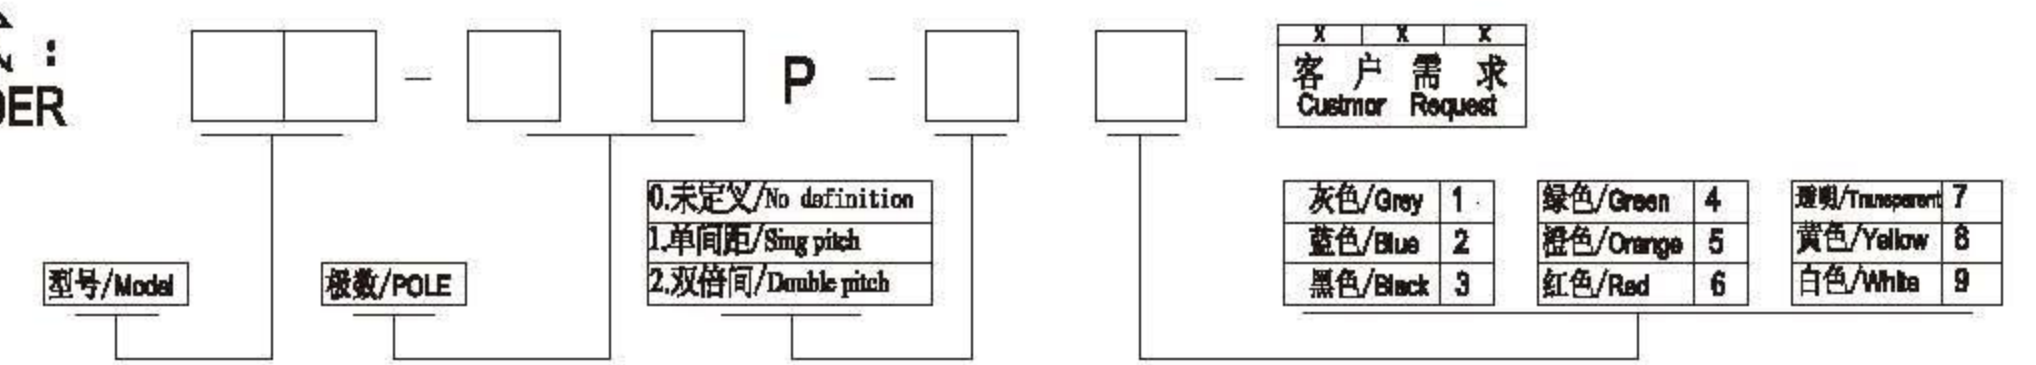

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension (Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to all					
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例	第一视角/THIRD ANGLE PROJECTION	
 CIXI ULO ELECTRONICS CO., LTD 慈溪欧乐电子有限公司						名称/NAME	EG306V-5.0 “+”