


# SIP..

## SIP SOCKET (SCREW PIN) 2.54mm

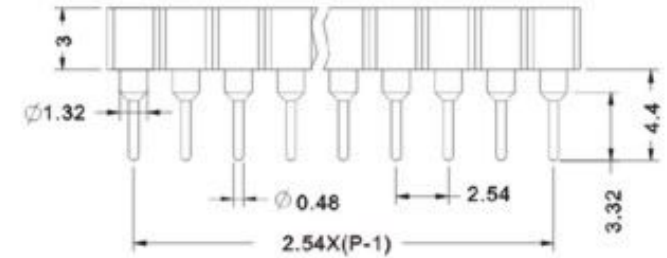

### Material and Finish:

Insulator: Glass Filled Thermoplastic PPS UL 94V-0

Contact: (BeCu), Beryllium Copper, **Inner Contact Gold Plated, Outer Sleeve Tin Plated**

Finishes: Outer Shield: Tin Plated

Inner Contact: Gold Plated

### Performance Characteristics:

Voltage Rating: AC 250V

Current Rating: 1AMP

Withstanding Voltage: 1000V AC For 1Minute

Contact Resistance: 15 Milliohms Max

Insulator Resistance: 1000 Megohms Min

Operating Temperature:  $-55^{\circ}\text{C}$  --  $+105^{\circ}\text{C}$

Contact Style: Four-Fingered Inner Contact

**Marites**