
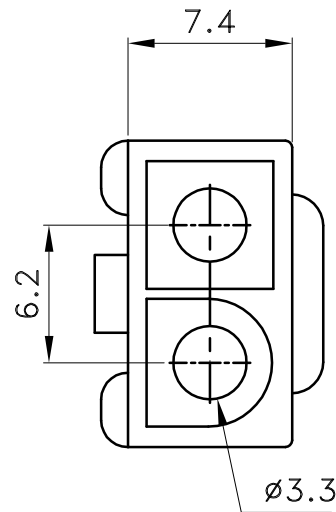


JS-2000H-01

■ SPECIFICATIONS

- Current Rating : 9~15A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

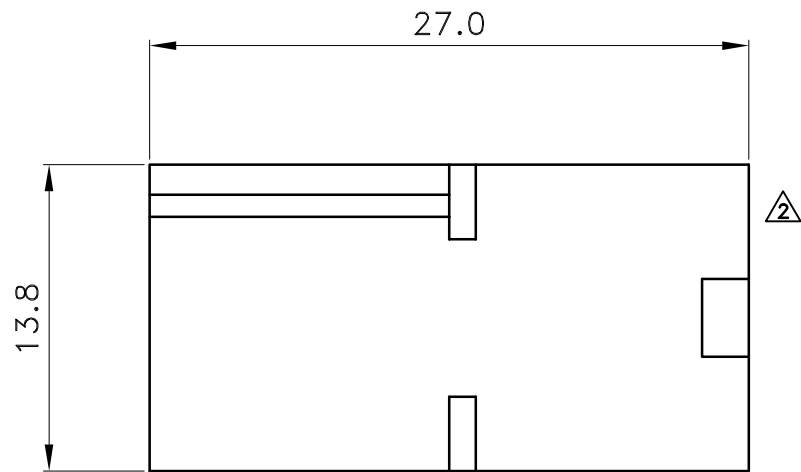

JS-2000H-02

■ RECEPTACLE

- Part No. : JS-2000H-XX
- Poles : 01, 02
- Material : Nylon 66 UL94V-2



喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△	變更原因遺失	余秀麗	2005/05/15	△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△	移除圖面上三角形符號	王誠賢	2011/12/31	△			
黃科源	⊕ □	a2	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE						CUSTOMER		
王誠賢	2011/12/31	A4	0° ±1°	△					Conforms to The RoHS Instruction		
			.0° ±	△							
			SHEET	1/1	△						

PART NO JS-2000H-XX

6.20mm WIRE TO WIRE POWER CONNECTOR