

Material:

△ * Insulator: LCP With 35% GF/mineral.
UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB01 ** * D 1 00

① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Contact: 04 to 50

△ ③ Plating code:

2= Gold flash plated over 1.27μm(50μ") Nickel


3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

④ Tail Style: D = DIP Type

⑤ Insulator Color: 1 = Black

⑥ Other option:

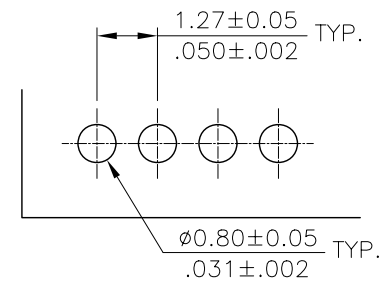

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.67

* Available in 4 through 50 Circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

| | | | | | | | | | | |
|-----|-------|----------|---------------------|-------------------|-------------------|---|-----------------|---|------------------------------------|----------------------|
| ④ | | | | | | DATE | UNIT: mm / inch | TITLE: PITCH 1.27mm(.050") DIP TYPE SOCKET | 瀚荃股份有限公司 CviLux Corporation | |
| ③ | | | DRAWN BY: Sandy | | 4/30-07' | TOLERANCE UNLESS OTHERWISE SPECIFIED | | | | |
| ② | Sandy | 4/30-07' | ECN07156/ECR07018-1 | | ENGINEER: Eisley | 5/2-07' | .X ± 0.25/.010 | X' ± 1" | MATERIAL: | |
| ① | SUN | 10/15/04 | ECR04056-1/ECN04394 | | CHECKED BY: David | 5/2-07' | .XX ± 0.15/.006 | .X' ± | FINISH: | |
| SYM | NAME | DATE | REVISIONS | APPROVED BY: Alex | 5/2-07' | .XXX ± 0.08/.003 | .XX' ± | | DRAWING NO. CB0101SC | PART NO. CB01***D100 |
| | | | | | | | | | SCALE 6 / 1 | SHEET 1 OF 1 |