
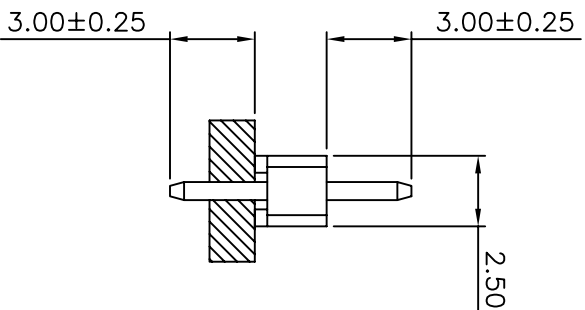


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be GP materials

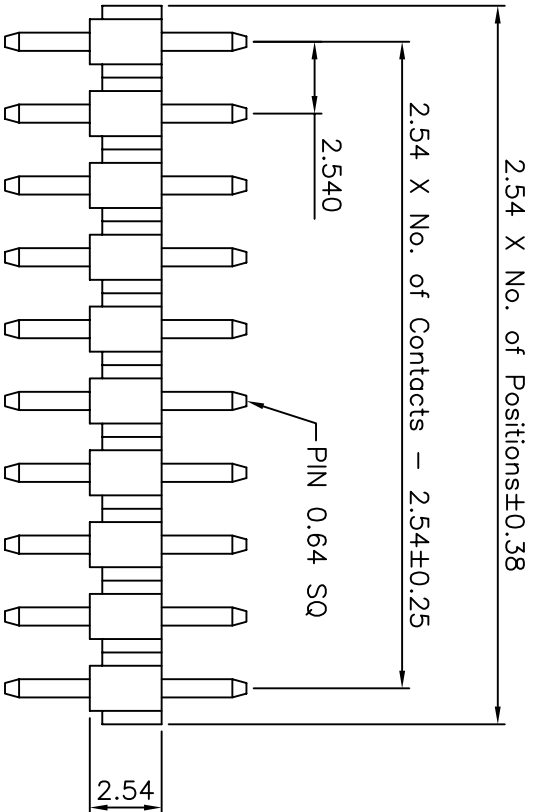


Ordering Information

G PHA101 - XX XX A 22

No. of Pins per Row
 02-40
 Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin

Recommended P.C.Board
 Hole Layout



REV.	01	UNIT	mm	SCALE	4=1		GENERAL TOLERANCE			DRAWN	LENGJIANUN	DATE	DWG. NO.	TITLE
							X. ± 5°	X. ± 5°	X. ± 5°	CHECK	DATE	G PHA101-A22	2.54 PIN HEADER	
							XX. ± 1°	XX. ± 0.38						
							XXX. ± 0.5°	.XXX ± 0.25	APPROVE		DATE	PART NO.	SINGLE ROW DIP TYPE	
								.XXX ± 0.13				G PHA101- XX XX A 22	BASE 2.54MM	

格 稜 股 份 有 限 公 司
Greenconn Corporation