

Connector

DIP PLUG 2.00mm(0.079") /MF.D

Electrical Characteristics:




Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated over nickel
 Cable: 1.00mm(0.039") pitch flat cable



Features:

- * Fast connection of flat cable to PC board.
- * Plug directly into 2.00mmX2.00mm PC board.

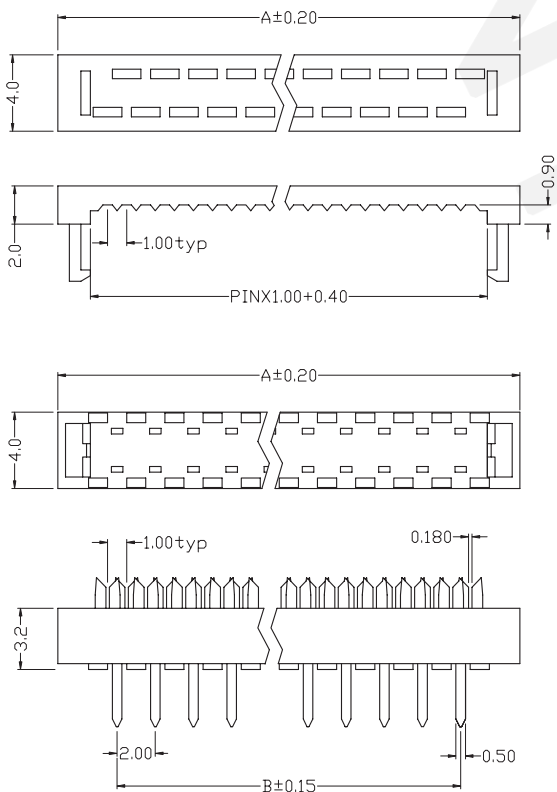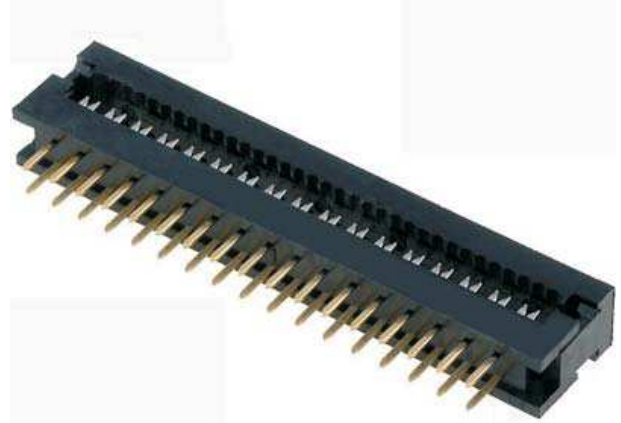

Dimension

Position	A	B
08	12.20	6.00
10	14.20	8.00
12	16.20	10.00
16	20.20	14.00
18	22.20	16.00
20	24.20	18.00
22	26.20	20.00
24	28.20	22.00
26	30.20	24.00
30	34.20	28.00
34	38.20	32.00
40	44.20	38.00
44	48.20	42.00
50	54.20	48.00



P.C.B Layout