
AX61131TM

1U Cost-effective Rackmount Chassis for ATX Motherboard

Features

- Supports IMB serials (IMB206/IMB207/IMB208)
- Two 4 cm system Fan
- Supports 1Ú Flex ATX 270W power supply
- Internal two 3.5 HDD drive bays



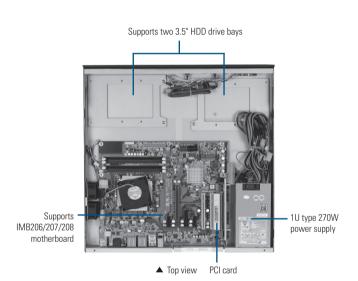



▲ Front view



▲ Rear view

Specifications

Standard Color	Black	
Construction	heavy-duty steel	
Drive Capacity	Internal 2 x 3.5" HDD drive bay	
Cooling	2 x 4 cm ball-bearing fan	
Front Panel Indicators	1 x power on/off , 1 x HDD	
Front Panel Controls	1 x power on/off	
Front Panel Connectors	2 x USB	
Rear-Punched Panel	Rear 1 x 9-pin, 1 x 25-pin	
System Board	IMB206, IMB207, IMB208	

Expansion Interface	1 x PCI slot (32 bits/33 MHz)
Operation Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	440 mm (17.3") (W) x 428 mm (16.8") (D) x44 mm (1.73") (H)
Weight (net/gross)	9.8 kg (21.6 lb)/10.8 kg (23.81 lb)

^{*} All specifications and photos are subject to change without notice.

Power Supply Specifications

Items	Watt		Specifications	
		Input	Output	MTBF
PS270-1U			+5V@18A +12V1@16A	
	ATX 270W (FPC)	AC 90~264V (Auto)	+12V2@10A +3.3V@16A	100,000 hours
		(Auto)	12V@0.8A ±5\/Sh@2.5∆	nours

Ordering Information

^{*}Specifications and certifications are based on options and may vary.

Recommended MB Selections

IMB206 with LGA1156 Heatsink (manufacture option) IMB207 with LGA1156 Heatsink (manufacture option) IMB208 with LGA1156 Heatsink (manufacture option)

Packing List

AX61131TM chassis x 1 CPU cooler x 1 PCI riser card bracket x 1 Screw pack x 1

F296200100	AX96200-RC 1-slot 32-bit PCI riser card

Optional Item

Dimensions

Appendix

Peripherals &

Accessories

Embedded

Embedded

Transportation

Embedded

Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems Industrial Chassis

Backplanes

Power Supplies

440 44.4 428 480 ∞ 465