


MATERIALS:

INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 COLOR:BLACK, YELLOW, RED, BLUE, GREEN, GREY, WHITE, ORANGE
 CONTACTS:BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL
ELECTRICAL:
 CURRENT RATING:1AMP.
 INSULATION RESISTANCE:1000M MIN. Ω
 DIELECTRIC WITHSTANDING:500VAC
 OPERATING TEMPERATURE:-55 °C~+105 °C

DIMENSIONS			
CONTACTS	A	B	C
06	15.06	5.08	3.2
08	17.90	7.62	3.2
10	20.14	10.16	3.2
12	22.67	12.70	3.2
14	25.22	15.24	3.2
16	27.80	17.78	3.2
20	32.88	22.86	3.2
24	38.32	27.94	3.2
26	40.50	30.48	3.2
30	46.00	35.56	3.2
34	50.70	40.64	3.2
40	58.30	48.26	3.2
44	63.78	53.34	3.2
50	71.05	60.96	3.2
60	84.10	73.66	3.2
64	89.25	78.74	3.2

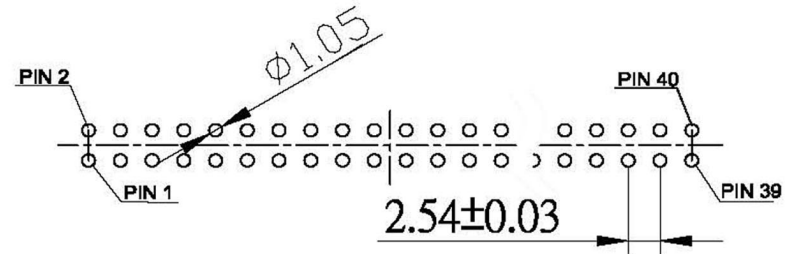

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	 TOLERANCE 容許公差 0 ±0.2 .00 ± ANG. ±	PART NAME 品名 BOX HEADER 2.54mm X 2.54mm XXP 90°GOLD PLATING BLACK INSULATOR PBT MATERIAL ROHS LOW-LEAD	
DWG. 製圖 BETTY	SCALE 比例 參考	UNIT 單位 M M	SIZE. 紙張尺寸 A 4
DATE 制表日 2008/07/04	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C3510-XXRPG B00R