
IFO2175-830-FL

17" TFT Fanless Touch Panel Computer with Intel® Atom™ Processor N270

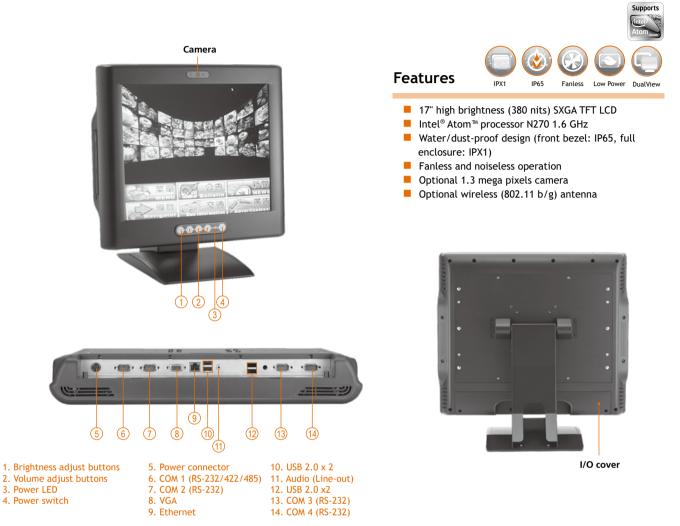

Introduction

The IFO2175-830-FL is a slim panel computer equipped with a 17-inch 380 nits SXGA LCD display and supports superior Intel[®] Atom[™] processor N270. Powered by Intel[®] 945GSE+ICH7M core logic chipset with maximum 256 MB sharing graphics memory, this panel computer has better graphics performance. The panel computer also supports DualView and multiple I/O options including 4 USB 2.0, and 4 RS-232 ports. The built-in 1.3 mega pixels camera and speakers can provide a solution for VoIP and remote monitoring. The IFO2175-830-FL also supports an antenna for 802.11b/g wireless connectivity. The Gigabit Ethernet port can provide superior high speed of Ethernet. It features low noise, low power

consumption, high reliability and high performance. Its excellent industrial design (ID) and user friendly interface design make the IFO2175-830 safe, reliable & user-friendly panel computer. Best suited for infotainment, media content display and DSA solutions.

Water/dust-proof design for entire system: IPX1

The IPX1-rated water/dust-proof housing protects the entire system from outside damage of water drip in public maintenance and re-installation place. This unique design improves system stability and save maintenance and re-installation time.

Specifications

Front Bezel	Plastic ABS (Black)		BIOS	AMI BIOS with SmartView and customer
LCD Panel	Display Type	17" SXGA TFT		CMOS backup
	Brightness (cd/m ²)	380 nits	Storage	1 x 2.5" SATA HDD (optional)
	Resolution	1280 x 1024		1 x CompactFlash™
	Viewing Angle (H/V)	160°/160°	Optical Drive	1 x combo drive (optional)
Main System	CPU	Intel [®] Atom™ processor N270 1.6 GHz	Watchdog	255 levels, 1~255 sec.
	Chipset	Integrated in Intel [®] 945GSE + ICH7M	Timer	
	System Memory	1 x DDR2 SO-DIMM max. up to 2 GB	Onboard	Integrated in Intel® 945GSE; max. memor
			Graphics	shared 256 MB

I/O Connector	3 x RS-232 (COM 2/3/4)		
	1 x RS-232/422/485 (COM 1)		
	4 x USB 2.0		
	1 x Audio (Line-out)		
	1 x VGA		
	1 x 10/100/1000Mbps Ethernet		
Expansion Interface	1 x Mini card slot		
Camera	1 x 1.3 mega pixels camera		
Touchscreen	Resistive type		
Power Supply	12V _{DC} with AC-DC power adaptor		
Dimensions	437.98 mm (17.24") (W) x 68.5 mm (2.7") (D)		
	x 376.41 mm (14.82") (H)		
Weight (net/gross)	7.65 kg (16.85 lb)/9 kg (19.84 lb)		
Environment	Operating temperature:		
	0°C ~ +40°C (32°F ~ 104°F)		
	Relative humidity: 10% ~ 95%, non-condensing		
	Shock: 10G peak acceleration (11 sec. duration)		
Certification	CE		

Ordering Information

IFO2175-830-FL with combo	17" TFT high brightness fanless panel computer with Intel® Atom™ N270, resistive T/S, slim combo and camera
IFO2175-830-FL w/o	17" TFT high brightness fanless panel computer with
combo	Intel [®] Atom [™] N270, resistive T/S (w/o combo and
	camera)

* Specification and certifications are based on options and may vary.

Optional Accessories

E202003330	VM-101 VESA ARM (clamp type)
E202003329	VM-105 VESA ARM (wall mount type)
E222175103	17" stand kit

Optional EOS Installation

Windows[®] XP Embedded

Optional OS Installation

Windows[®] XP Windows[®] 7 Overview

Digital Signage

Healthcare & Medical Solutions > Medical Panel

Healthcare & Medical Solutions > Medical Grade

Fanless & Heavy-duty Touch Panel Computers

Touch Panel Computers for Infotainment

Industrial Touch Pa Computers & Monit > Industrial Touch Papel Computer

Industrial Touch Pan Computers & Monito > Industrial Touch Panel Monitors

Open Frame Pane Computers

Accessories

Dimensions

