


# ◆ SPECIFICATION

DESCRIPTION	UL2896 - 40N × 150mm * 0,5p * (4/4 , 8/8) * (0,05*0,32) * P6		
KRT PART NO.		DRAWING NO.	

## ▶ CABLE TYPE (PATTERN : 6 )

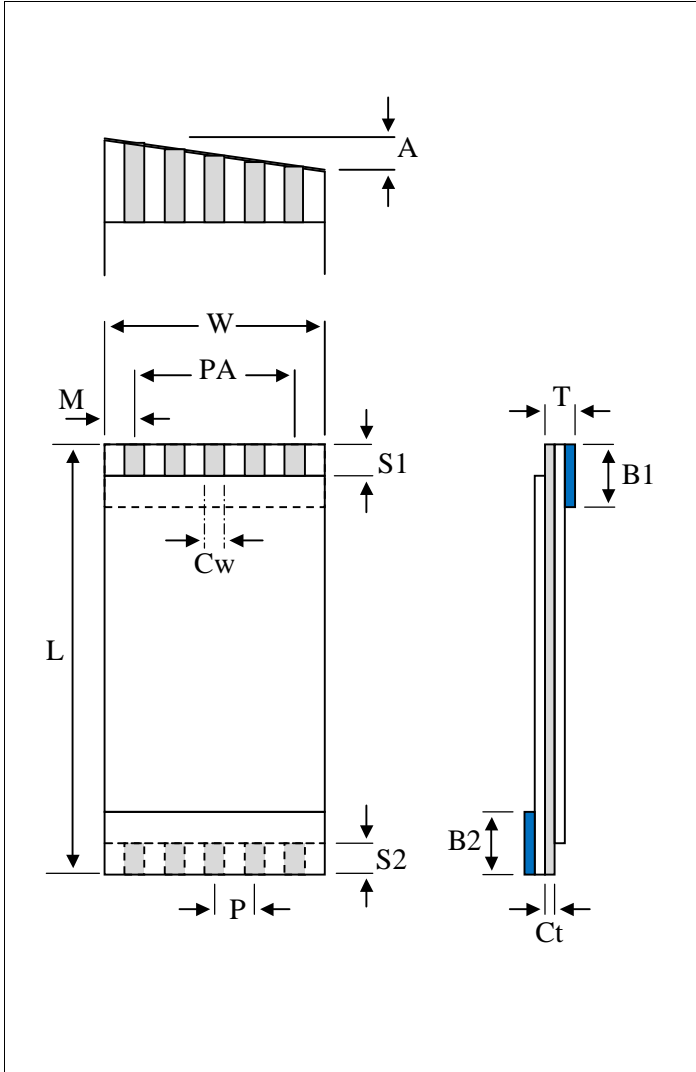

## ▶ CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	0,5	± 0.05
NO. OF CONDUCTOR	N	40	-
CABLE LENGTH	L	150	±3.00
STRIP LENGTH	S1	4	± 1.00
	S2	4	± 1.00
S/T LENGTH	B1	8	± 2.00
	B2	8	± 2.00
INSERT THICK	T	0,3	± 0.05
WIDTH	W	20,50	± 0.10
SPAN	PA	19,50	± 0.10
MARGIN	M	0,50	± 0.10
CONDUCTOR THICK	Ct	0,05	± 0.01
CONDUCTOR WIDTH	Cw	0,32	± 0.02
LESS THAN	A	0,5	-
PLATED	PL	1µm ↑	

## ◎ REMARK