

序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	
2	下铁壳	
3	104F 塑料主体	
4	104F 塑料后盖	
5	104F 端子 (短)	
6	104F 端子 (长)	

Specifications:

Contact Resistance: 30mΩ max. at DC 100 mA

Insulator resistance: 1000MΩ min. at DC 500V

Current Rating: 3AAMP




Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C--+105°C

Contact: Brass


Housing: PBT &30% Glass Fiber (UL 94V-0)

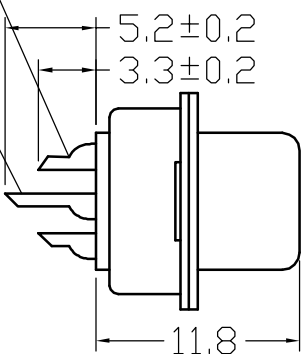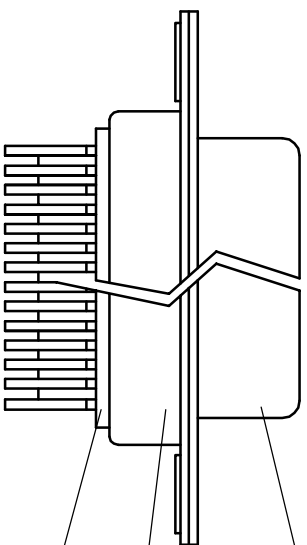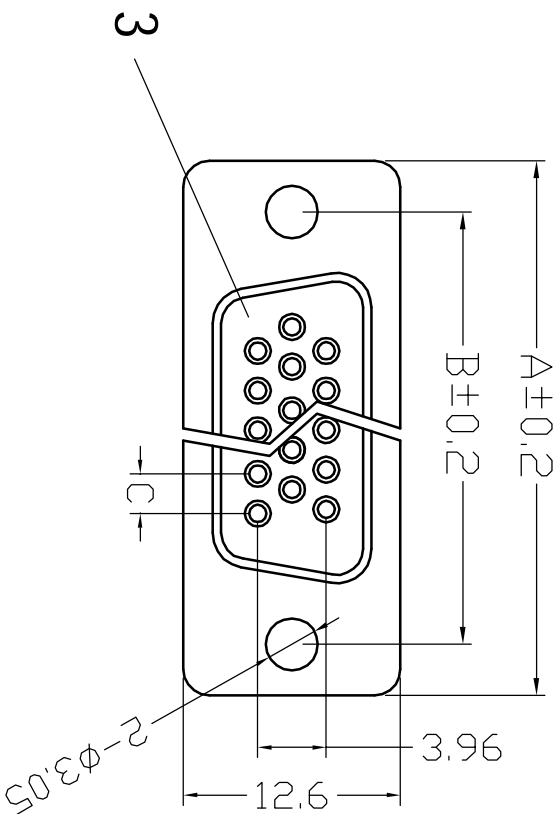

Position	A	B	C
15	30.81	24.99	2.29
26	39.20	33.32	2.29
44	53.10	47.04	2.29
62	69.50	63.50	2.41

设计/Designed by: 绘图/Draw ing by: 审核/Checked by: 批准/Approved by:

未注公差  
General Tolerance



新亚电子

XINYA ELECTRONIC CO., LTD

图名/Title

文件编号/File No.

X: ±0.2  
X: ±0.1  
.XX: ±0.05  
.XXX: ±0.01

104F 产品图

页序/Sheet

单位/Unit: mm

序号/RevNo.

更改记录/Revision note

签名/Signature

日期/Date