

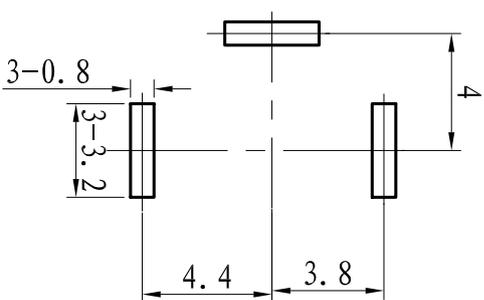
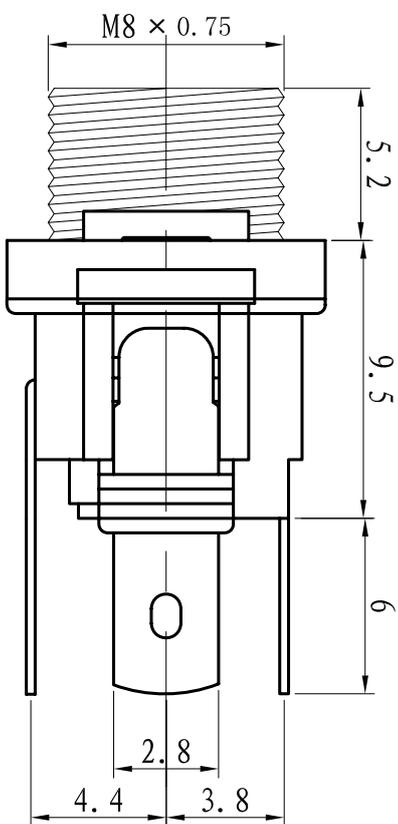


技术参数/Specifications

| | |
|------------------------------|---------------------|
| 额定参数/Rating | 0.5A 30VDC |
| 环境温度/Environment Temperature | -25°C ~ 85°C |
| 接触电阻 Contact Resistance | ≤ 30mΩ |
| 绝缘电阻/Insulation Resistance | ≥ 100MΩ (at 500VDC) |
| 电气寿命 Electrical life | 5000 Cycles |
| 操作力 Operating Force | 3 ~ 20N |

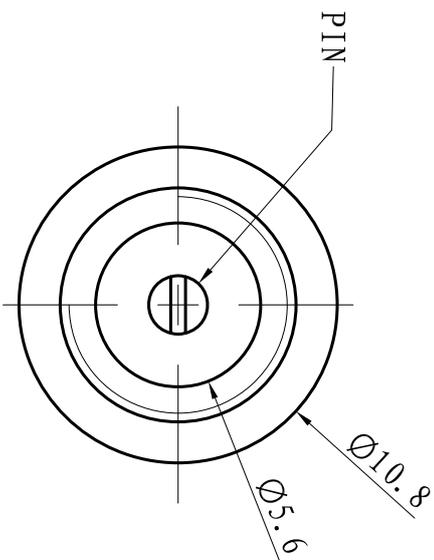

CIRCUIT:



| | | |
|------|------|------|
| PIN | Φ2.0 | Φ2.5 |
| APPD | Yes | |

NOTE:

TOLEANCE UNLESS OTHERWISE SPECIFIED
 X. ± 0.30 . X ± 0.20 . XX ± 0.10

| | |
|--|--|
| 修改日期/修改记录 MODIFY DATE/CHANGE FILE NO. | |
| 由谁/谁 BY/WHO | |
| 日期 DATE | |
| 签名 SIGNATURE | |
| 图号 DRAWING FILE NO. | |
| 图名 DRAWING FILE NO. | |

| | | | | | |
|--------------|-------------|------------|--------------------------|------------------------|------------|
| 设计 DESIGN | 审核 CHECK | 工艺 WORK | 更改文件号 REFUSE FILE NO. | 标准号 STANDARDIZATION | 日期 DATE |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

成品图
PRODUCT DRAWING

| | | | |
|---------------------|------------|-----------|-------------|
| 投影 PROJECTION | 版次 REV. | 重量 WT. | 比例 SCALE |
| 第一角 FIRST ANGLE | A0 | | 4:1 (A4) |
| 共 1 页 THE 1 PAGE | | | |

ZHEJIANG JIALONG ELECTRON CO., LTD

DC 插座
DC power socket

DC-025M -2.0