


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

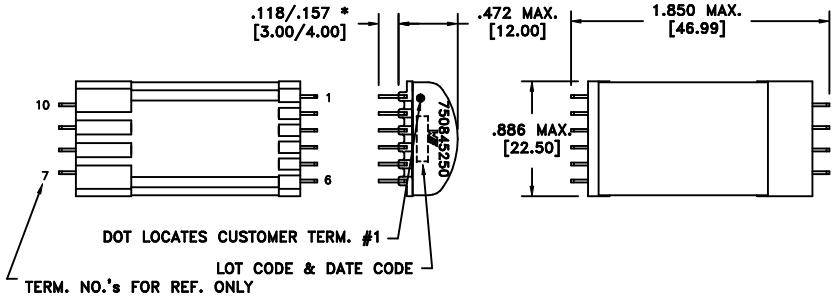


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-1 @20°C	1.450 ohms max.
D.C. RESISTANCE	7-8 @20°C	0.450 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.160 ohms max.
INDUCTANCE	3-1 50kHz, 0.1VAC, Ls	1.2mH±10%
DIELECTRIC	tie (3+5), 3750VAC, 1 second	3000VAC, 1 minute
URNS RATIO	(3-1):(5-6)	6.462:1, ±2%
URNS RATIO	(3-1):(7-8)	2.806:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

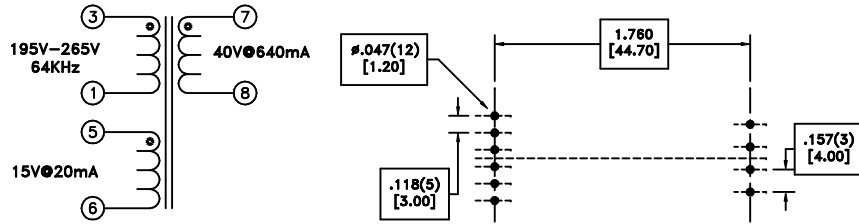

RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

REV.	DATE	Packaging Specifications Method: Tray PKG- www.midcom-inc.com		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750845250
01	7/11	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750845250	SPECIFICATION SHEET 1 OF 1