


NA110

Fanless Slim-type Network Appliance Platform with AMD G-Series T24L Processor and 4 LANs

Features

- AMD G-Series T24L processor
- One DDR3-1066 SO-DIMM, up to 4GB memory
- Four 10/100/1000 Mbps Ethernet ports (Realtek 8111E)
- Wi-Fi module through PCI Express Mini Card for optional
- Suitable for VPN, network bandwidth controller and firewall applications

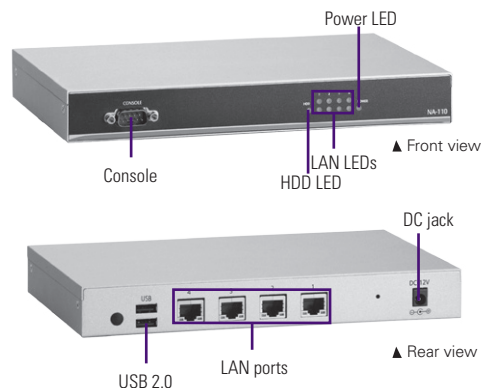

Specifications

System	
CPU	AMD G-Series T24L processor
Chipset	AMD A50M
Memory	1 x DDR3-1066 SO-DIMM, up to 4GB non-ECC memory
BIOS	AMI SPI Flash BIOS
Storage	1 x 2.5" SATA HDD 1 x CompactFlash™ type-II 1 x CFast™ (optional)
Network Interface	4 x 10/100/1000 Mbps Ethernet (Realtek 8111E)
I/O Interface	1 x RS-232 (DB9) 2 x USB 2.0 4 x RJ-45
Other Features	LAN Bypass function through latch relay (one pair) for optional
Expansion Slot	1 x PCI Express Mini Card
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	1 x 12V, 5A power adapter
OS Compatibility	Linux Kernel 2.6

Mechanical/ Environmental

Form Factor	Slim desktop
LED	Power, HDD, Link/Act with transfer rate
Operating Temp.	0°C ~ +40°C (+32°F ~ +104°F)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	30 mm (1.18") (H) x 230 mm (9.05") (W) x 151.5 mm (5.96") (D)
Weight (net/gross)	2.2 kg (4.85 lb)/2.46 kg (5.42 lb)
Certificates	FCC class B/CE class B

Ordering Information

Standard

NA110-D4GR-CF-US (P/N: E26E110103)	Fanless network appliance with AMD T24L processor and 4 GbE LANs
---------------------------------------	--

Optional

59463315040E	Console cable 1.8M, M-M round
E9C6200001	PCI Express Mini VGA card

* Specifications and certifications may vary contingent on options.

Packing List

1 x DC power adapter 12V/5A
1 x Power cord
1 x SATA cable

Dimensions

