


PIN HEADER R/A & SMT TYPE



ULO-PH410


PITCH: 2.54mm

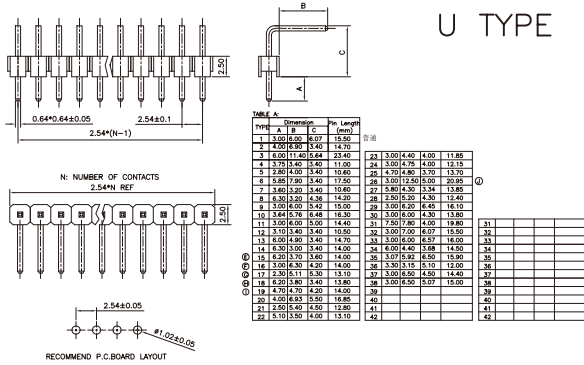

HOW TO ORDER

ULO-PH410 - X X U X X


- Dim. A B C type
- 1: Type 1
- 26: Type 26
- CONTACT PLATING
- F1: FULL GOLD FLASH
- 6: FULL TIN
- BEND TYPE
- U:U TYPE
- MOUNTING TYPE
- R:R/A
- No.OF CONTACTS
- 1*1 - 1*40

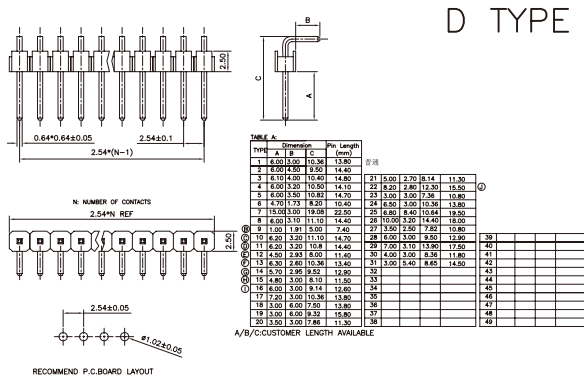

HOW TO ORDER

ULO-PH410 - X X D X X


- Dim. A B C type
- 1: Type 1
- 22: Type 22
- CONTACT PLATING
- F1: FULL GOLD FLASH
- 6: FULL TIN
- BEND TYPE
- D:D TYPE
- MOUNTING TYPE
- R:R/A
- No.OF CONTACTS
- 1*1 - 1*40

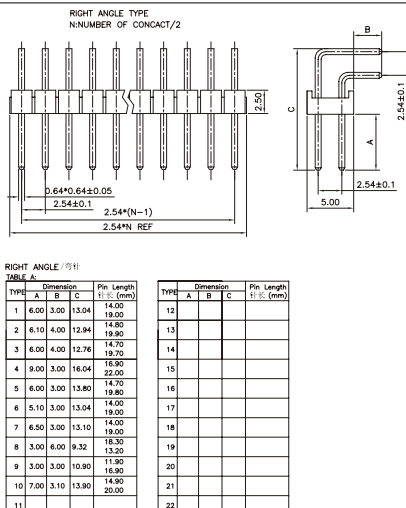

HOW TO ORDER


ULO-PH410 - X X X - X

- Dim. A B C type
- 1: Type 1
- 7: Type 7
- CONTACT PLATING
- F1: FULL GOLD FLASH
- 6: FULL TIN
- MOUNTING TYPE
- R: RIGHT ANGLE
- No. OF CONTACTS
- 2*2 - 2*40
- 3*2 - 3*40

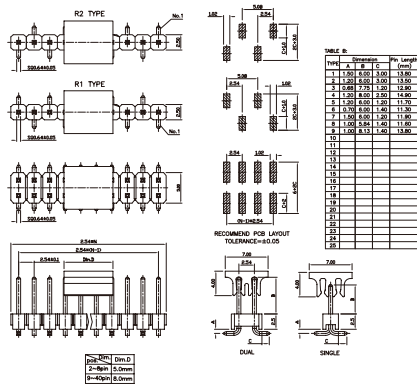

HOW TO ORDER

ULO-PH410

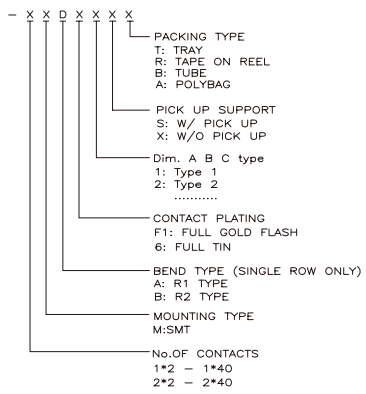

Specification	
Contact Resistance:	3A
Contact Resistance:	20mΩ Max
Dielectric Withstanding:	600V AC
Insulation Resistance:	1000MΩ Min
Temperature Range:	-45°C~+105°C
Operating Temperature:	-40°C~+105°C
Material	
Insulator:	PBT Or PA-46
Contact Material:	Copper Alloy