

# CONNTERM

## PCB Connector


Pitch=4.20mm TYPE

### Electrical Specification:



Rated Voltage: 300V AC/DC  
 Rated Current: 9A  
 Contact Resistance: 0.015Ω max  
 Insulation Resistance: 1000MΩ min  
 Withstand voltage: 1500V AC/MIN  
 Temperature range for usage : -40°C~+105°C

### Material:

Housing: PA66 (PA66) UL94V-2  
 Contacts: Brass  
 Plating: Tin 50u" over 100u" nickel  
 Wire range : AWG#30~#22

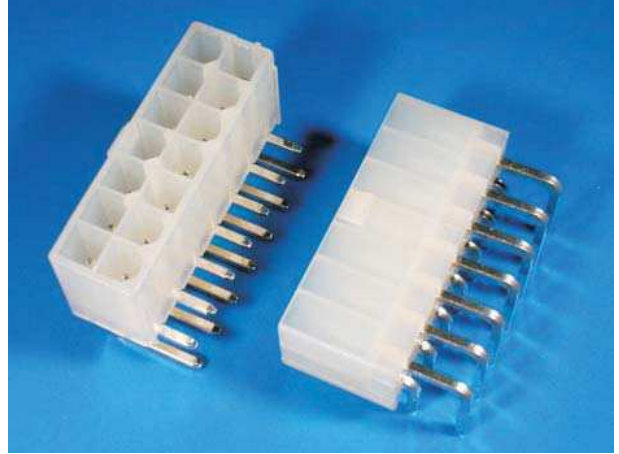

### Double layer Right pin

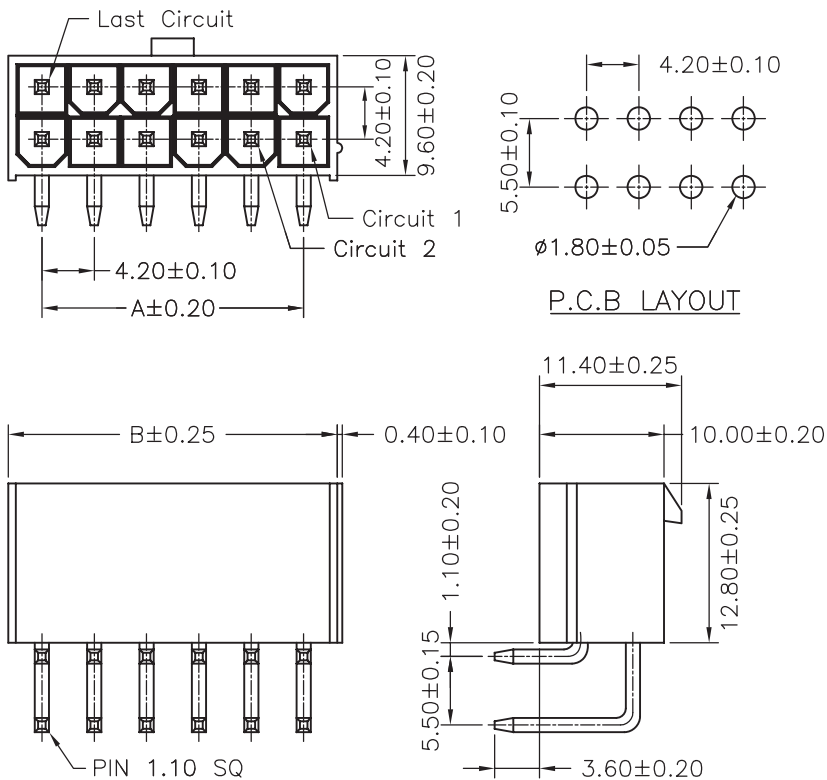

PART NO.	Dimensions	
	A	B
2X01	---	5.40
2X02	4.20	9.60
2X03	8.40	13.80
2X04	12.60	18.00
2X05	16.80	22.20
2X06	21.00	26.40
2X07	25.20	30.60
2X08	29.40	34.80
2X09	33.60	39.00
2X10	37.80	43.20
2X11	42.00	47.40
2X12	46.20	51.60