


工程变更单号 ECN NO		变更说明 DESCRIPTION		版次 REV	发行时间 DATE	确认 ACCEPT	审核 CHECK	批准 APPROVAL
				A04				

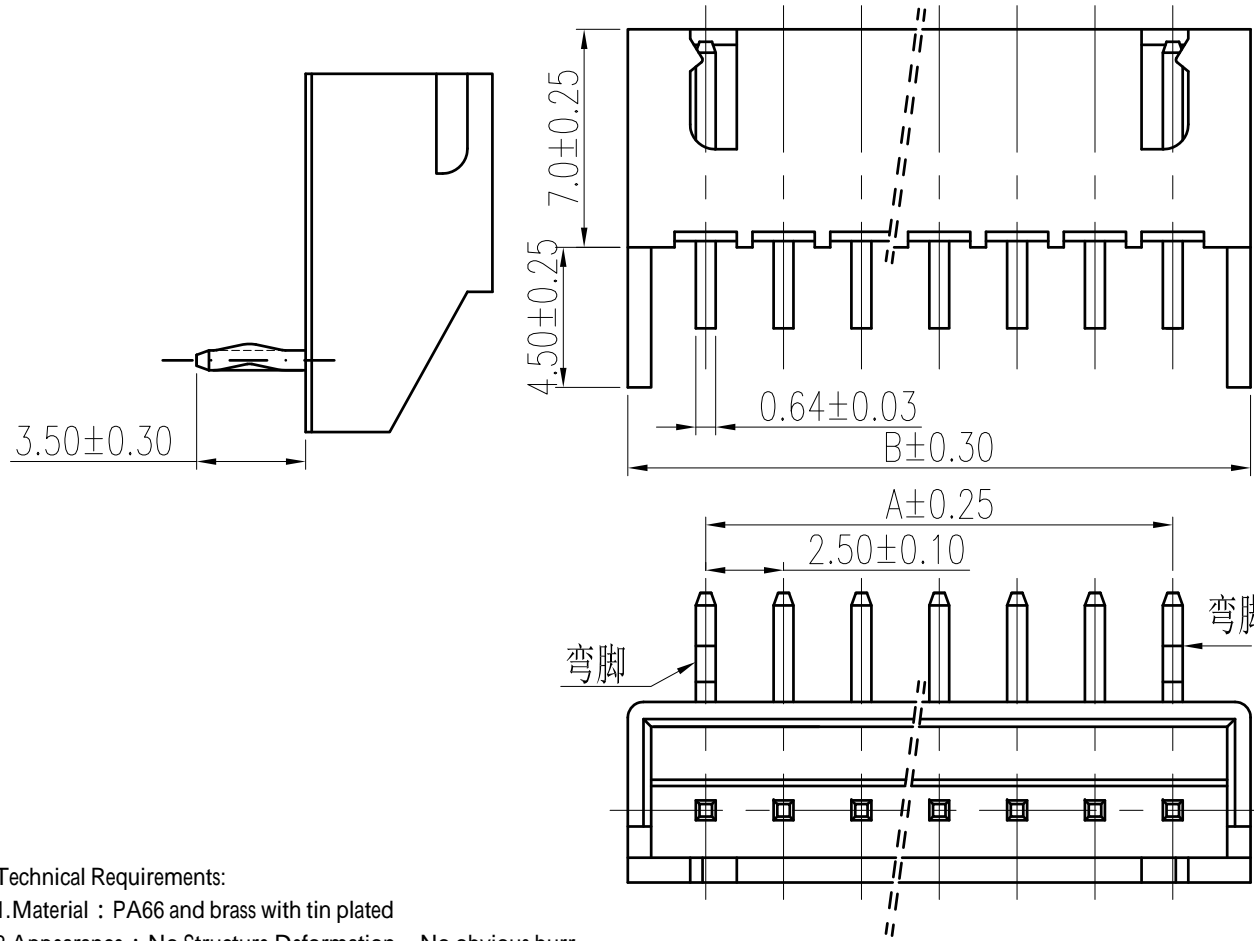

Technical Requirements:

- Material : PA66 and brass with tin plated
- Appearance : No Structure Deformation、 No obvious burr.
- Electrical Characteristics:
 - Rated Voltage:250V;
 - Rated Current:2A
 - Insulation Resistance: 1000M
 - withstand voltage:1500V AC/1 minute
- Temperature Range:-25 ~ +85
- Dimensional Tolerance:GB/15055-94
- Specification of the pin: 0.64*13.50 (right-angled)
- Tin rate of the brass pin : 95%
- STEADY FORCE of the pin: 20N

线数 poles	弯式(90°)	尺寸Dimensions(mm)	
	珠城型号Type	A	B
2	HW2502J-2QA	2.5	7.4
3	HW2502J-3QA	5	9.9
4	HW2502J-4QA	7.5	12.4
5	HW2502J-5QA	10	14.9
6	HW2502J-6QA	12.5	17.4
7	HW2502J-7QA	15	19.9
8	HW2502J-8QA	17.5	22.4
9	HW2502J-9QA	20	24.9
10	HW2502J-10QA	22.5	27.4
11	HW2502J-11QA	25	29.9
12	HW2502J-12QA	27.5	32.4
13	HW2502J-13QA	30	34.9
14	HW2502J-14QA	32.5	37.4
15	HW2502J-15QA	35	39.9

未注尺寸公差按下表

尺寸	公差	尺寸	公差
DIM	TOL	DIM	TOL
.X	±0.20	.X	±2°
.X	±0.15	.X	±1°
.XX	±0.10		
.XXX	±0.05		

ZUCH 浙江珠城科技股份有限公司
Zhejiang ZUCH Technology Co., Ltd

文件编号 FILE NO	ZC-II-43	日期 DATE	产品名称 TITLE	XH针座(弯针)/塑件	
设计 DESIGN			成品料号 PART NO	HW2502J-NQA	
审核 CHECK				版次 REV	A04
批准 APPROVAL			比例 SCALE	1:1	单位 UNIT
				mm	

客户图

