


I Direction	
PIN	Signal
1	Overall Shield
2	Y + Receive
3	Y - Transmit
4	Y - Receive
5	Y Ground
6	Shield
7	X Ground
8	X+Receive
9	X Transmit
10	X - Receive
11	X - Transmit
12	X - Receive

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

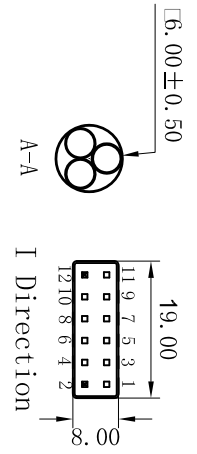

Unmarked Tolerance		Quality Level
From (mm)	to (mm)	
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

SAW screen specs			
sign	weight	scale	Free
Total X 1 P X 1 P			



Dongguan Clouch Electronic Co., Ltd.

product CTR121C-4F-GDS

Drawing No.