


I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Overall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

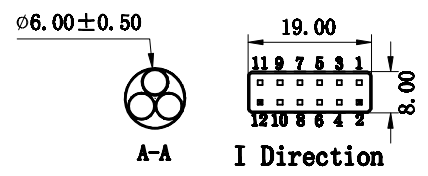

Unmarked Tolerance							SAW screen specs			
from (mm)	to (mm)	Quality Level	mark	Content of Amendment	Edition	Author	Date	sign	weight	Scale
0	10	±0.05								
10	50	±0.10	Design		standard					Free
50	100	±0.15	Drawing		process					
100	200	±0.20	Check		Approve					

Product Requirement:
Glue line way: on the bevel edge

Chintech
Dongguan Chintech Electronic Co., Ltd.
product
CTB215C-4K
Drawing No.

mark

sign

weight

Scale

Free

Total X 1 P X 1 P