


I Direction		Insulation Color
PIN	Signal	Overall Shield
1	Overall Shield	
2	Y + Receive	BLUE
3	Y + Receive	BLUE
4	Y - Transmit	BLUE
5	Y - Receive	BLACK
6	Y - Ground	YELLOW
7	Shield	
8	X - Ground	GREEN
9	X+Receive	WHITE
10	X - Transmit	RED
11	X - Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

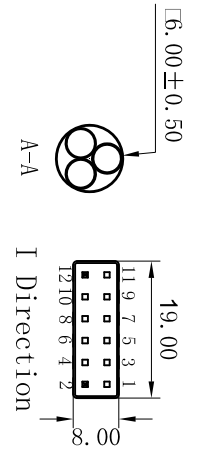

Unmarked Tolerance		Quality Level
From (mm)	to (mm)	
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

SAW screen specs				product	
mark	Content of Amendment	Edition	Author	Date	Drawing No.
Design		standard			
Drawing		process			
Check		Approve			
sign				scale	
weight				Free	
Total X 1 P X 1 P					

Chintech
Dongguan Chintech Electronic co., Ltd.

product
CTB230C-4K

Drawing No.