

REV	E.C.N. NO.	CONTENT	CHK	DATE
V0.0		初版	ZCP	2016.11.24


NOTES:

- Rating: 250V/2A
<IEC> 250V/2A
- Poles:06P
- Insulation Withstands Voltage: AC2000V/1 Min
- Insulation Resistance: 500M Ω at DC500V
- Using Temperature Range: -40°C/+115°C
- Max soldering : +250° for SS
- RoHS Compliance
- Suitable Electric Wire:24-20AWG(U) 0.2-0.5mm² (IEC)
- With "★" "is important dimension"

How to order

UL0-TB12 - 250B/2.5 - 06P -1 0 0 0A

Certificate Factory poles color: Customer requirements
 Series NO. Code
 1:Grey
 2:Blue
 3:Black
 4:Green
 5:Orange
 6:Red
 7:transparent
 8:Yellow
 9:white

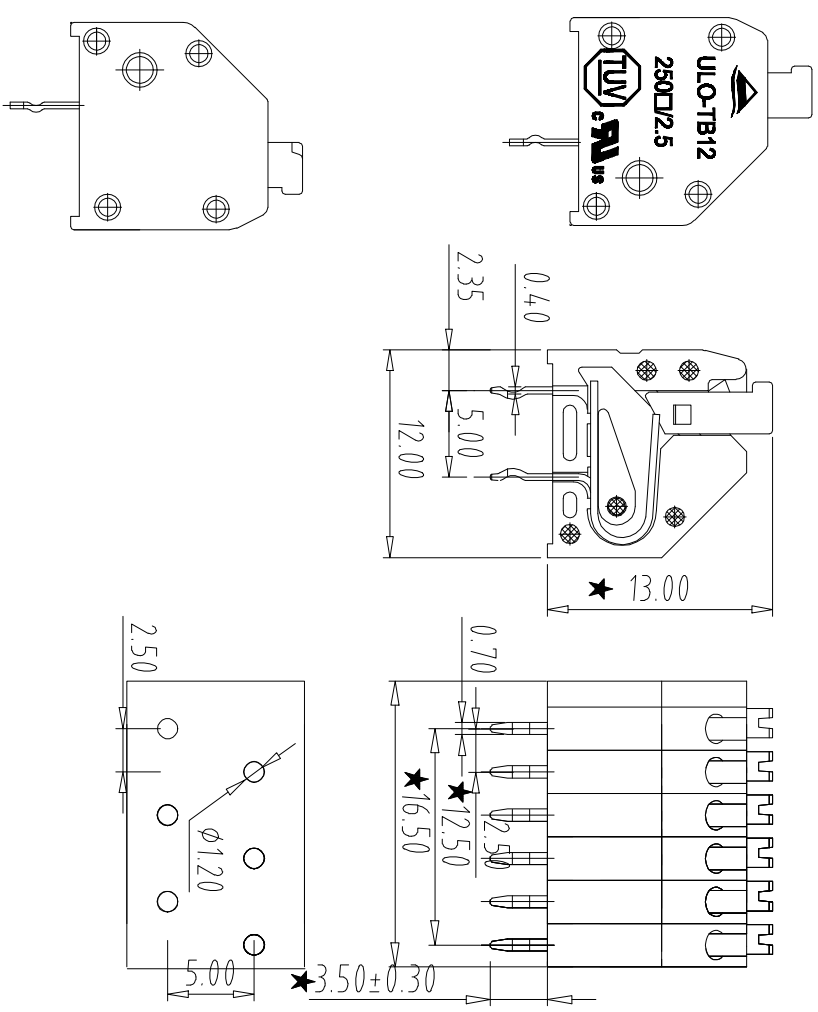

Todd Pitch Tolerances		Nominal dimension range	
in mm	over	in mm	over
0	0	0	0
30	53	30	53
70	115	70	115
90	150	90	150
150	200	150	200
200	250	200	250
250	320	250	320
30	53	30	53
70	115	70	115
90	150	90	150
150	200	150	200
200	250	200	250
250	320	250	320
30	53	30	53
70	115	70	115
90	150	90	150
150	200	150	200
200	250	200	250
250	320	250	320
0.18	0.20	0.3	0.3
0.20	0.25	0.35	0.35
0.25	0.3	0.44	0.44
0.3	0.35	0.55	0.55
0.35	0.4	0.70	0.70
0.4	0.44	0.75	0.75
0.44	0.5	0.80	0.80
0.5	0.55	0.90	0.90
0.55	0.6	1.0	1.0
0.6	0.65	1.1	1.1
0.65	0.7	1.2	1.2
0.7	0.75	1.3	1.3
0.75	0.8	1.4	1.4
0.8	0.85	1.5	1.5
0.85	0.9	1.6	1.6
0.9	0.95	1.7	1.7
0.95	1.0	1.8	1.8
1.0	1.05	1.9	1.9
1.05	1.1	2.0	2.0
1.1	1.15	2.1	2.1
1.15	1.2	2.2	2.2
1.2	1.25	2.3	2.3
1.25	1.3	2.4	2.4
1.3	1.35	2.5	2.5
1.35	1.4	2.6	2.6
1.4	1.45	2.7	2.7
1.45	1.5	2.8	2.8
1.5	1.55	2.9	2.9
1.55	1.6	3.0	3.0
1.6	1.65	3.1	3.1
1.65	1.7	3.2	3.2
1.7	1.75	3.3	3.3
1.75	1.8	3.4	3.4
1.8	1.85	3.5	3.5
1.85	1.9	3.6	3.6
1.9	1.95	3.7	3.7
1.95	2.0	3.8	3.8
2.0	2.05	3.9	3.9
2.05	2.1	4.0	4.0
2.1	2.15	4.1	4.1
2.15	2.2	4.2	4.2
2.2	2.25	4.3	4.3
2.25	2.3	4.4	4.4
2.3	2.35	4.5	4.5
2.35	2.4	4.6	4.6
2.4	2.45	4.7	4.7
2.45	2.5	4.8	4.8
2.5	2.55	4.9	4.9
2.55	2.6	5.0	5.0
2.6	2.65	5.1	5.1
2.65	2.7	5.2	5.2
2.7	2.75	5.3	5.3
2.75	2.8	5.4	5.4
2.8	2.85	5.5	5.5
2.85	2.9	5.6	5.6
2.9	2.95	5.7	5.7
2.95	3.0	5.8	5.8
3.0	3.05	5.9	5.9
3.05	3.1	6.0	6.0
3.1	3.15	6.1	6.1
3.15	3.2	6.2	6.2
3.2	3.25	6.3	6.3
3.25	3.3	6.4	6.4
3.3	3.35	6.5	6.5
3.35	3.4	6.6	6.6
3.4	3.45	6.7	6.7
3.45	3.5	6.8	6.8
3.5	3.55	6.9	6.9
3.55	3.6	7.0	7.0
3.6	3.65	7.1	7.1
3.65	3.7	7.2	7.2
3.7	3.75	7.3	7.3
3.75	3.8	7.4	7.4
3.8	3.85	7.5	7.5
3.85	3.9	7.6	7.6
3.9	3.95	7.7	7.7
3.95	4.0	7.8	7.8
4.0	4.05	7.9	7.9
4.05	4.1	8.0	8.0
4.1	4.15	8.1	8.1
4.15	4.2	8.2	8.2
4.2	4.25	8.3	8.3
4.25	4.3	8.4	8.4
4.3	4.35	8.5	8.5
4.35	4.4	8.6	8.6
4.4	4.45	8.7	8.7
4.45	4.5	8.8	8.8
4.5	4.55	8.9	8.9
4.55	4.6	9.0	9.0
4.6	4.65	9.1	9.1
4.65	4.7	9.2	9.2
4.7	4.75	9.3	9.3
4.75	4.8	9.4	9.4
4.8	4.85	9.5	9.5
4.85	4.9	9.6	9.6
4.9	4.95	9.7	9.7
4.95	5.0	9.8	9.8
5.0	5.05	9.9	9.9
5.05	5.1	10.0	10.0

5	SHORT-PIN	3001B0020	N/2	Phosphor bronze	Tin Plated
4	LONG-PIN	3001B0010	N/2	Phosphor bronze	Tin Plated
3	LEVER	3001D0Y00A	N	PA66	UL94V-0
2	Cover	3001C0Y00A	1	PA66	UL94V-0
1	Housing	3001A0YXXA	N	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	Li Li	DATE	19.09.12	UNITS	MM
CHK		DATE		SCALE	1:1
APP.		DATE		SHEET/OF	A4 / 1/1
				UL0-TB12-250B/2.5-06P-1000A	
NINGBO UL0 ELECTRONICS CO.,LTD.				UL0TB12Y000A	