


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

- Material
 - ①Screws : M2.5 steel, Zinc plated, "-"- slot type
 - ②Housing : PA66, UL94V-0
 - ③Contact : Phosphor bronze, Ni plated
 - ④Clamp : Brass, Ni plated
 - ⑤Cover : PA66, UL94V-0

- Electrical



UL	IEC
Rated voltage : 300V	400V
Rated current : 15A	10A
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2500V/1min	
Wire range: 28-12AWG	2.5mm ²

- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ± 5 / 5sec
 - Torque: 0.4N.m (3.54lb.in)
 - Strip length: 7-8mm

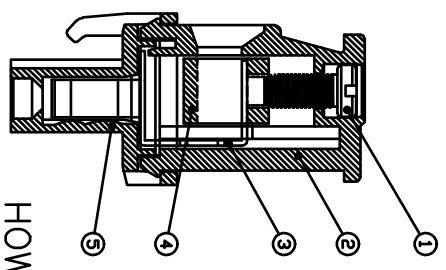




HOW TO ORDER

KF2EDGKA-7.62-XXP-1 X-XXXXXX

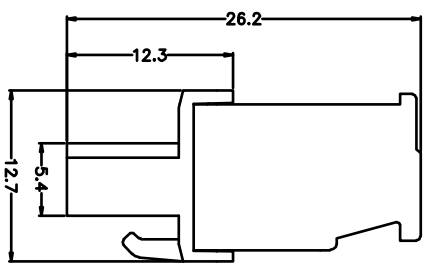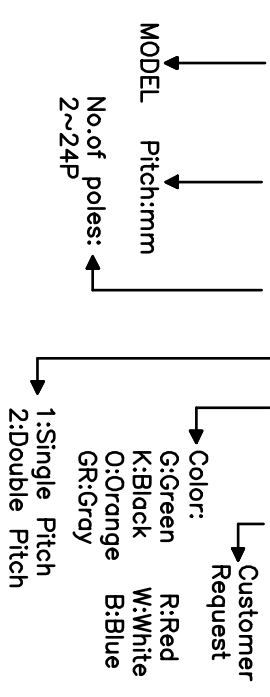

N=Number of Poles
 Dim P=(N-1)x7.62
 Dim L=Nx7.62-1.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

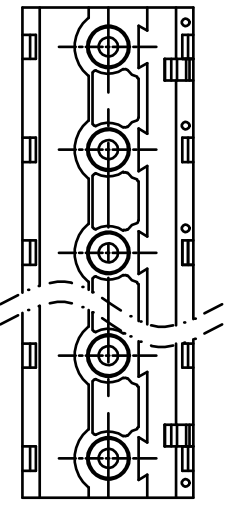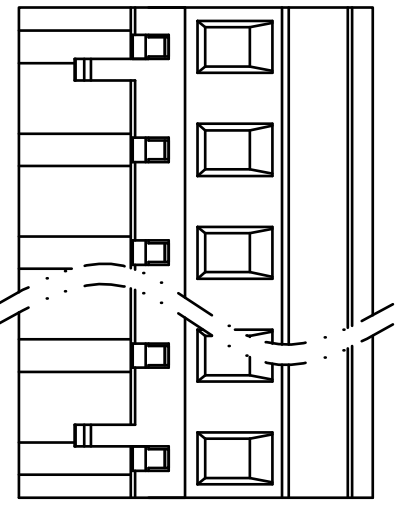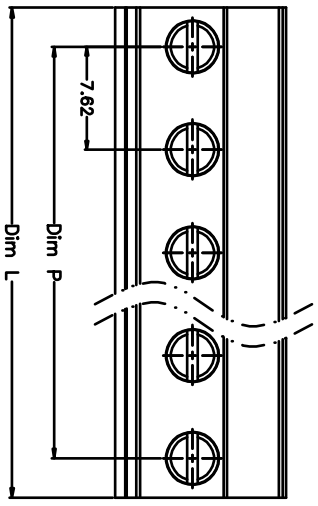

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5'
.X	±0.3	.X.	±3'
.XX	±0.1	.XX.	±1'

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION UNITS TITLE

UNITS	mm	TITLE	KF2EDGKA-7.62-XXP
SHEET SIZE	A4	SERIES	KF2EDGKA

凯峰电子有限公司
 KAIFENG ELECTRONIC
 CIXI KAIFENG ELECTRONIC CO.,LTD