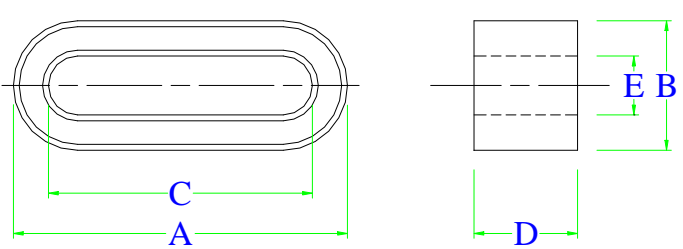


SPECIFICATION FOR APPROVAL

| | | | |
|-----------|---|----------|--------------|
| COMMODITY | SUPPRESSION CORES | SPEC NO. | SP-090708003 |
| ITEM | K5A RP 33.5×6.5×12 Green | 版本：A | 表單編號：TRR-002 |

| (1) DIMENSION: (UNIT: mm) | | DIM. | TOL. | |
|---|---|-------|------|--|
|  | A | 33.50 | ±0.9 | |
| | B | 6.50 | ±0.5 | |
| | C | 27.00 | ±0.6 | |
| | D | 12.00 | ±0.5 | |
| | E | 1.40 | ±0.4 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| (2) ELECTRICAL CHARACTERISTIC | TEST INSTRUMENTS. | |
|-------------------------------|-------------------|---|
| IMPEDANCE at Z 1 | 20 (min) | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. |
| IMPEDANCE at Z 2 | 30 (min) | <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. |
| IMPEDANCE at Z 3 | 55 (min) | <input type="checkbox"/> HP-4286A RF L.C.R. Meter. |
| TEST FREQUENCY at Z 1 | 30 MHz | <input type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. |
| TEST FREQUENCY at Z 2 | 50 MHz | <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. |
| TEST FREQUENCY at Z 3 | 100 MHz | <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. |
| | | <input type="checkbox"/> ZENTECH 1320 BIAS CURRENT. |
| | | <input type="checkbox"/> ZENTECH 502AC Resistance Meter. |
| | | <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter. |

REMARK :


1. uiac : 700
2. Winding : 0.6 ×100 mm 2UEW 1Ts

| | | | |
|---------------------|--|---|---|
| PURCHASER CONFIRMED | APPROVED | CHECKED | DRAWN |
| |  |  |  |

TEST REPORT

| | | | |
|-------------|---------------------------|-----------|----------------|
| COMMODITY : | SUPPRESSION CORES | SPEC NO : | SP-090708003 |
| Type : | K5A RP 33.5×6.5×12 | 版本 : A | 表單編號 : TRR-004 |

Typical Impedance v.s. Frequency Curve

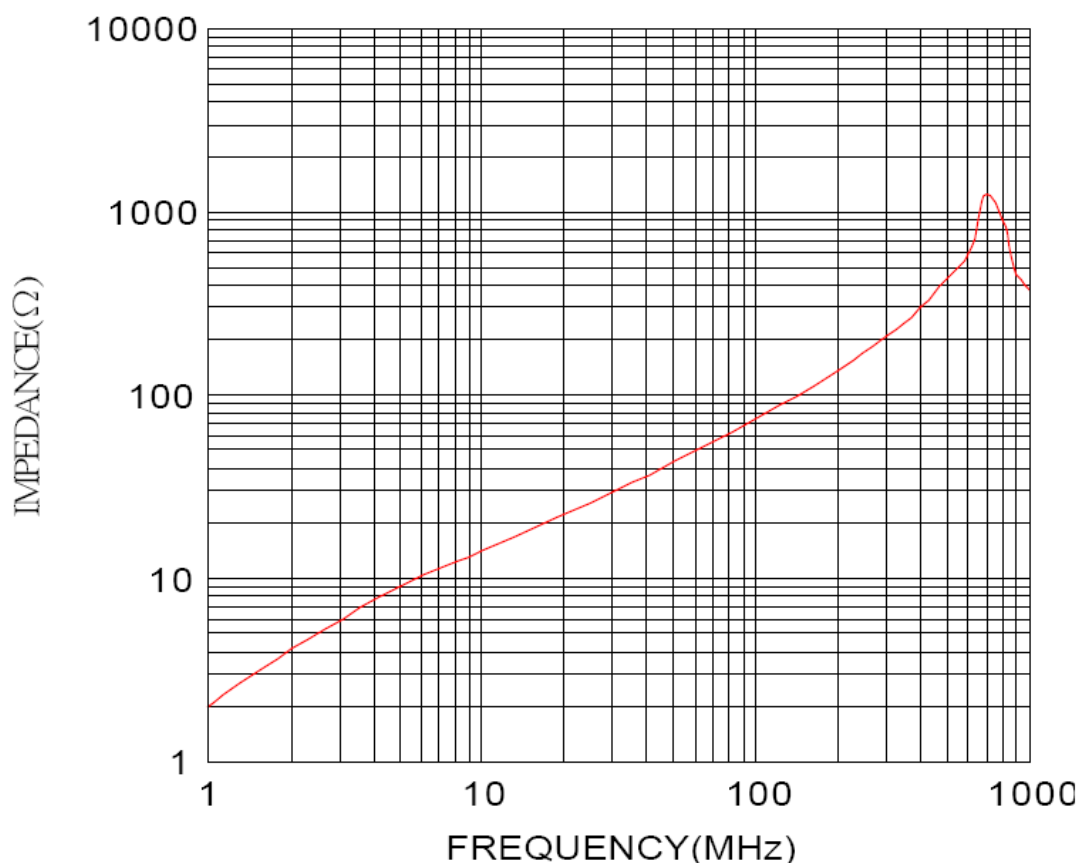

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28

Humidity : 60 to 70 % RH

Check by :



Test by :



JANTEK

JANTEK ELECTRONICS CO.,LTD

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw