

IEC inlet filters YB-B Series



- Rated currents up to 10A
额定电流达到10A
- For one or two Fuses
有单或双保险丝
- Optional medical versions((R5) type)
医疗设备专用(R5)系列
- Quick connect(6.3*0.8mm)
快速端子(6.3*0.8mm)

Approvals(认证):



Technical Data 技术参数

| | |
|--------------------------------------|--|
| Rated Voltage Max.(最大电压): | 250VAC, 50/60Hz |
| Operating frequency(工作频率): | DC to 400Hz |
| Rated currents(额定电流): | 1~10A@40°C |
| Hipot Rating (耐电压): | L-N 1450VDC L/N-G 2000VAC/2250VDC L/N-G 4000VAC(R5 type) |
| Protection level(防护等级): | IP40 according to IEC 60529 |
| Climatic category(气候类别): | -25°C~+85°C(25/85/21) |
| Design corresponding to(设计标准): | UL1283, CSA C22.2 No.8, IEC/EN 60939, CQC GB 15288/GB 15287-2008 |
| Flammability corresponding to(防火等级): | UL 94V-0 |

Features 产品特点

Versions to 10A are available with fuse holder for one or two (5*20mm) fuses

--最高达到10A有一个或两个(5*20mm)保险丝

(R5) types comply with the requirements of IEC/EN60601-1 for safety clearance, leakage current and hipot testing.

-(R5)医疗专用产品依据IEC/EN60601-1标准对安全间隙，低漏电流和超高耐压要求设计。

There are a variety of parts and combinations to meet different customer's EMC tests

--有多种零件组合搭配，来满足不同客户整机EMC测试

Customized products according to customer's requirements

--可按客户要求定制不同规格产品

Typical Applications 应用范围

Portable electrical and electronic equipment

--便携式电器和电子设备

Electrical schematic 电路图

Standard type

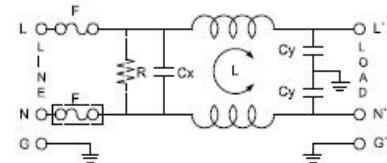


Fig.1

R5 type

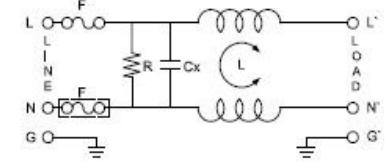


Fig.2

Lg type

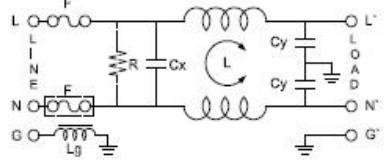


Fig.3

Medical equipment

--医疗设备

Test and measurement equipment

--测量测试设备

Small and medium-sized machines and household equipment

--中小型机械设备和家用设备

Single-phase power supply, switch-mode power supply

--单相电源，开关电源

Rule of Nomination 命名原则说明

| | | | | | | | | |
|------------|------------|---------|------|-----|--------|-----|-----------------|--------------|
| YB | 11 | A3 | - | 10A | - | Q | (R 5 G) | B1: One Fuse |
| : 电路 | : 外壳 | : 尺寸 | : 电流 | : : | : 输出方式 | : : | : : | B2: Two Fuse |
| Electrical | Dimensions | Current | | | Output | | Optional 可选的 | |
| Schematic | | | | | | | | |

Product Tabulates 产品列表

| Model No. | Rated Current @40°C 额定电流 | Terminal Options* 输出方式 | | | Bleeder resistor(optional) 泄放电阻R(可选) | 接地电感 G(可选) | Leakage current 250V/50Hz 漏电流 | Electrical Schematic 电路图 | Rated Voltage(V) 额定电压 | Operating Frequency(Hz) 工作频率 |
|------------|--------------------------------|---------------------------|---|---|--|---------------|--|--------------------------------|-----------------------------|------------------------------------|
| 型号 | | Q | S | W | | | | | | |
| YB11B1-1A | 1A | Q | S | - | - | - | <0.8mA | Fig.1 | 115/250V | 50/60Hz |
| YB11B1-2A | 2A | Q | S | - | - | - | | Fig.1 | | |
| YB11B1-3A | 3A | Q | S | - | - | - | | Fig.1 | | |
| YB11B1-4A | 4A | Q | S | - | - | - | | Fig.1 | | |
| YB11B1-6A | 6A | Q | S | - | - | - | | Fig.1 | | |
| YB11B1-8A | 8A | Q | S | - | - | - | | Fig.1 | | |
| YB11B1-10A | 10A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-1A | 1A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-2A | 2A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-3A | 3A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-4A | 4A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-6A | 6A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-8A | 8A | Q | S | - | - | - | | Fig.1 | | |
| YB11B2-10A | 10A | Q | S | - | - | - | | Fig.1 | | |

医疗专用产品 Medical Version

| Model No. | Rated Current @40°C 额定电流 | Terminal Options 输出方式 | | | Bleeder resistor(optional) 泄放电阻R(MΩ) | Medical equipment 医疗专用 5 | 接地电感 G | Leakage current 250V/50Hz 漏电流 | Electrical Schematic 电路图 | Rated Voltage(V) 额定电压 | Operating Frequency(Hz) 工作频率 |
|------------------|--------------------------------|--------------------------|---|---|--|-----------------------------------|-----------|--|--------------------------------|-----------------------------|------------------------------------|
| 型号 | | Q | S | W | | | | | | | |
| YB11B2-1A-x(R5) | 1A | Q | S | - | 1 | 5 | - | <5μA | Fig.2 | 115/250V | 50/60Hz |
| YB11B2-2A-x(R5) | 2A | Q | S | - | 1 | 5 | - | | Fig.2 | | |
| YB11B2-3A-x(R5) | 3A | Q | S | - | 1 | 5 | - | | Fig.2 | | |
| YB11B2-4A-x(R5) | 4A | Q | S | - | 1 | 5 | - | | Fig.2 | | |
| YB11B2-6A-x(R5) | 6A | Q | S | - | 1 | 5 | - | | Fig.2 | | |
| YB11B2-8A-x(R5) | 8A | Q | S | - | 1 | 5 | - | | Fig.2 | | |
| YB11B2-10A-x(R5) | 10A | Q | S | - | 1 | 5 | - | | Fig.2 | | |



*Q: Fast-on 6.35x0.8mm




S: solder 4.0x0.8mm



W: UL1015 18awg

Mechanical Dimension 外形图(Unit: mm)

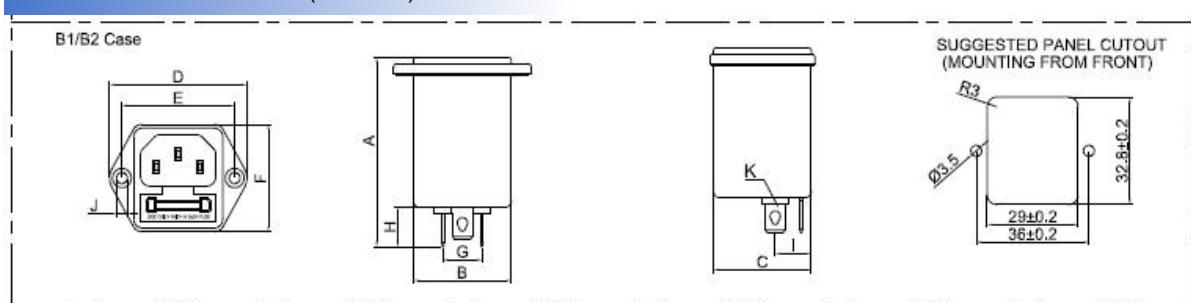

| Case | A | B | C | D | E | F | G | H | I | J | K |
|------------------|----|------|------|----|-------|------|------|------|------|-----|---------|
| B1 | 58 | 28.5 | 32.4 | 44 | 36 | 33.5 | 12.8 | 11.1 | 12 | 3.5 | 6.3*0.8 |
| B2 | 58 | 28.5 | 32.4 | 44 | 36 | 33.5 | 12.8 | 11.1 | 12 | 3.5 | 6.3*0.8 |
| Tolerances 公差 | ±1 | ±1 | ±1 | ±1 | ±0.15 | ±1 | ±0.5 | ±0.5 | ±0.5 | ±1 | ±0.15 |

Insertion loss table(In 50ohm system according IEC/CISPR No.17) 插入损耗(50欧姆测试系统, IEC/CISPR No.17)

