


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

Part Number:PS193P10Y◆1

"◆"	Colour/Materials
NT	Natural anodized (Al alloy)
BU	Blue anodized (Al alloy)
BK	Black anodized (Al alloy)
GD	Gold anodized (Al alloy)
RD	Red anodized (Al alloy)
SS	Stainless steel
GN	Green anodized (Al alloy)

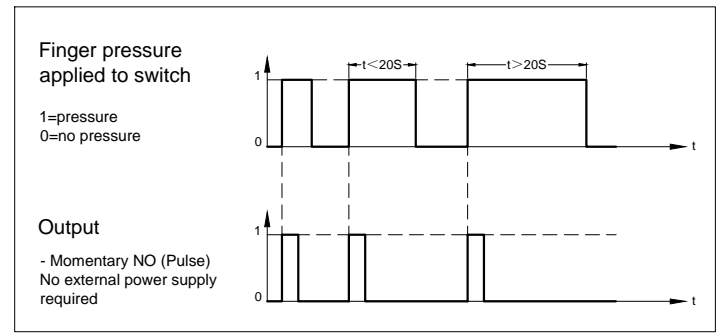

**SPECIFICATIONS:**

- 1.Switch Operation: Momentary NO (Pulse).
- 2.Max.Switch Rating: 200mA 24VAC/DC.
- 3.Operation Life: 50 Million cycles.
- 4.Wiring: AWG 26, Length 300mm.
- 5.IP Class: IP69K.
- 6.Operating Temperature: -40°C~ +75°C.
- 7.Operating Force: About 5~10N.

**MATERIALS:**

- 1.Body:Al Alloy/Stainless steel .

BRAND 品牌	<b>ONPOW</b>	<b>红波按钮制造有限公司</b> ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	USED 用途	APPD 审核	CH 2020/05/11
	FINISH 处理	CHKD 校对	NCH 2020/05/11
	SCALE 比例	UNIT 单位	DR. 制图
	1.7 / 1	mm	ZPD 2020/05/11
DIMENSIONS	TOLERANCE	TITLE 名称	
0.00 TO 18.00mm	±0.43mm	Piezo electric Switch	
18.01 TO 30.00mm	±0.52mm	DWG NO. 图号	SIZE 图纸
30.01 TO 50.00mm	±0.62mm	PS193P10Y不带灯	A4
50.01 TO 80.00mm	±0.74mm	FILE NAME 档案名称	REV. 更改
		PS193.DWG	
		SHEET 张	
		1 / 1	