

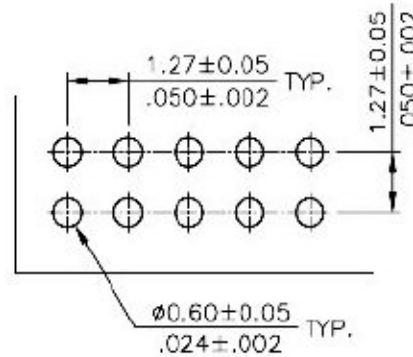
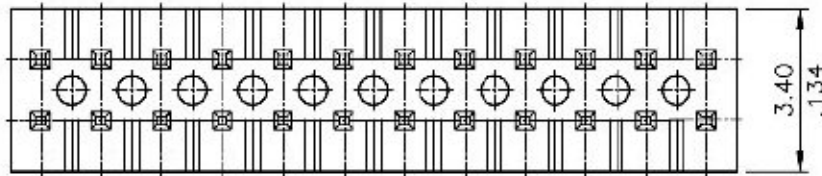


Material:

- \* Insulator: LCP With 30% GF.  
UL 94V-0 Color Black
- \* Square Pin: Brass

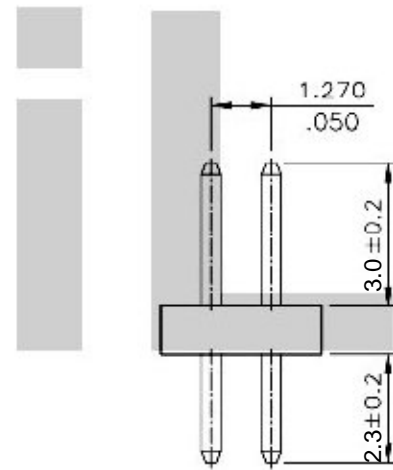

Recommended P.C. Boarded Layout

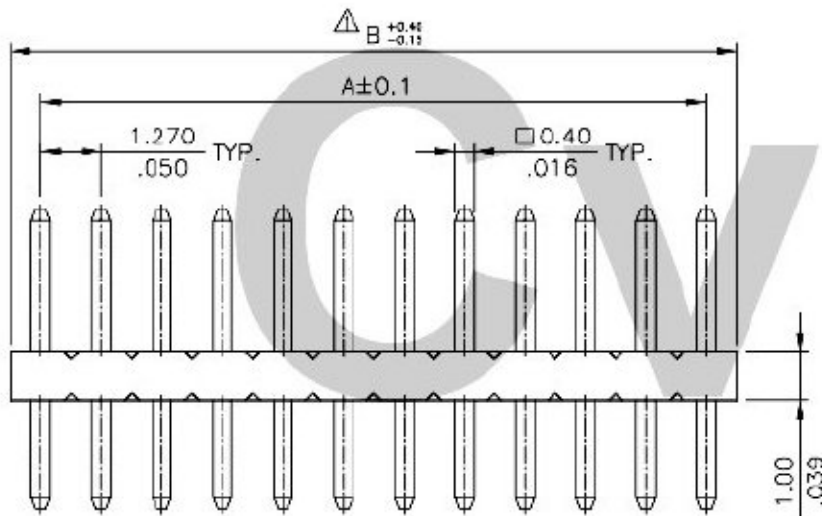

Ordering Code:

CH51 \*\* \* V 1 \*\*  
① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② No. of Contact: 06 to 100  
X1=100
- ③ Plating code:  
2=Gold Flash plated over  
1.27 $\mu$ m(50 $\mu$ " Nickel  
3=0.38 $\mu$ m(15 $\mu$ " Gold plated  
over 1.27 $\mu$ m(50 $\mu$ " Nickel  
4=0.76 $\mu$ m(30 $\mu$ " Gold plated  
over 1.27 $\mu$ m(50 $\mu$ " Nickel
- ④ Tail & Mounting Style:  
V=Straight DIP Type
- ⑤ Insulator Material & Color:  
1=LCP , Color Black
- ⑥ Option Code:  
See Table PDF. File No. CH5101T

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.27

\* Available in 6 through 100 Circuits

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") DUAL ROW BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation
③				DRAWN BY: Sandy	8/27 04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②				ENGINEER: Eisle	8/30 04'	X ± 0.25/.010 X' ± 1"	FINISH:	DRAWING NO. CH5101SD PART NO. CH51***V1**
①	Sandy	08/27/04'	ECN04327	CHECKED BY: David	8/30 04'	.XX ± 0.15/.006 X ±		SCALE 6 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	8/30 04'	.XXX ± 0.08/.003 .XX ±		