

6

5

4

3

2

DWG NO.	SH	REV
MA402	1	A

PROPRIETARY NOTICE: THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO AMPHENOL AND SHALL NOT BE DISCLOSED IN WHOLE OR IN PART IN ANY FORM OF FOR ANY REASON EXCEPT AS EXPRESSLY STATED IN WRITING BY AMPHENOL.

REVISIONS				
REV	REVISION HISTORY	DATE	DWN	APVD
-	INITIAL DRAFT	11/02/90	RJL	WRS
A	REDRAWN AND UPDATE TITLE BLOCK	03/22/16	JRL	STS

D

D

C


C

B

B

A

A

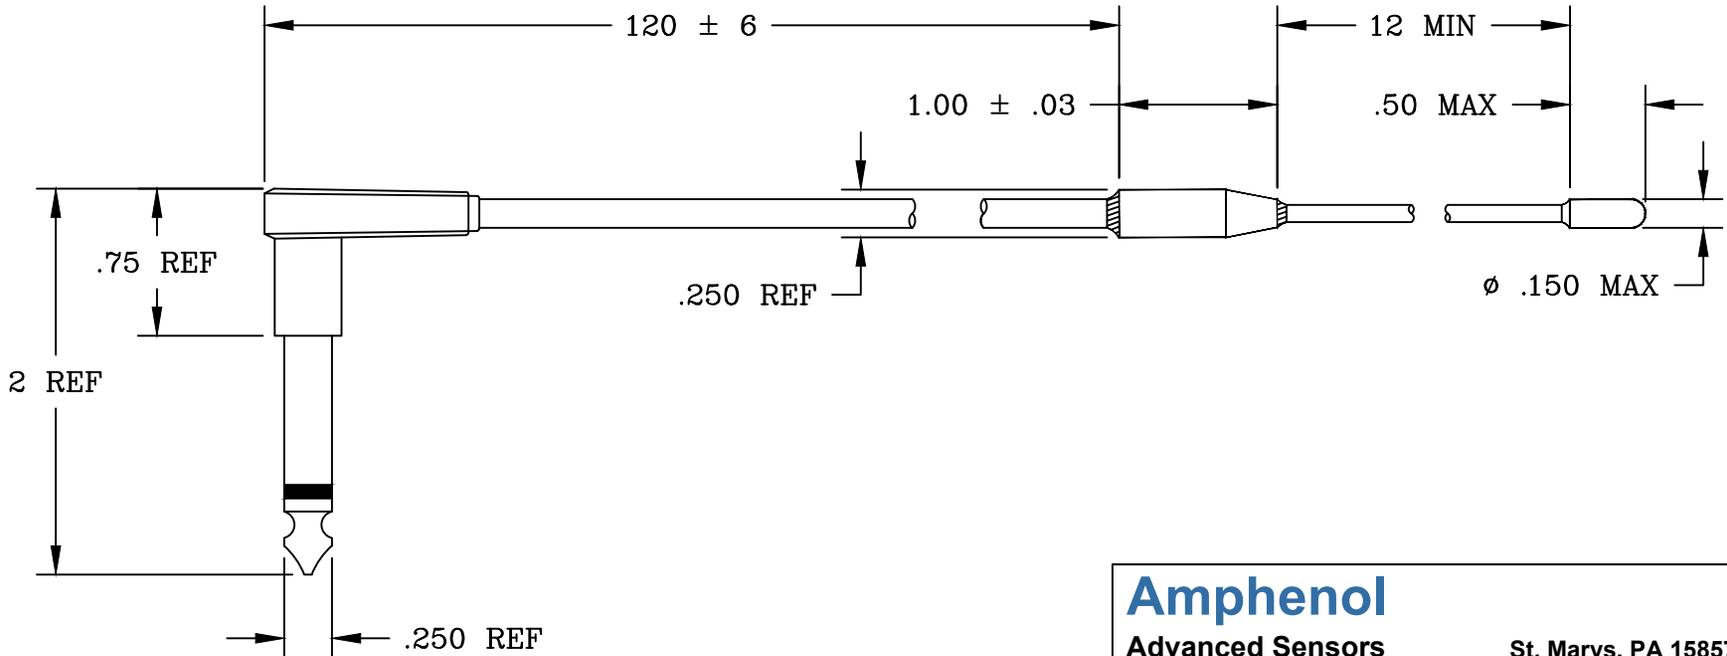

NOTES:

1. THERMISTOR: 2252 OHM @ 25°C, ±0.1°C FROM 0°C TO +70°C, THM MATL SYS F, R0/R50 = 9.08 NOM, 0/50 BETA = 3895 NOM.
2. HOUSING: EPOXY FILLED WHITE VINYL.
3. EXTENSION CABLE TO HOUSING: #26 AWG COAX, GREY PVC JACKET.
4. SPLICE HOUSING: RIGID GREY PVC.
5. CABLE: #22 AWG COAX WITH SPIRAL SHIELD, GREY PVC JACKET.
6. PLUG: STANDARD COMMERCIAL 1/4", 2 CONDUCTOR, Ni PLATED PHONE PLUG.

LEGAL NOTICE - THIS DRAWING AND ANY INTELLECTUAL PROPERTY RIGHTS THERE IN ARE PROPERTY OF AMPHENOL AND NO LICENSES ARE GRANTED UNDER THOSE RIGHTS.

Amphenol
Advanced Sensors St. Marys, PA 15857

TITLE
THERMISTOR ASSEMBLY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS .XX ± .01 .XXX ± .005 ANGLES ± 1°	APPROVALS DRAWN RJL	DATE 11/02/90
	CHECKED	
DO NOT SCALE DRAWING	ENGR WRS	11/02/90
THIRD ANGLE PROJECTION	DC	
INTERPRET DRAWING IAW ASME Y14.5	MFG	
MATERIAL SEE NOTES		
SIZE A	DWG NO. MA402	REV A
SCALE N/A	SHEET 1 OF 1	

6

5

4

3

2

1